



## Hand-held Microphones

### MD-58

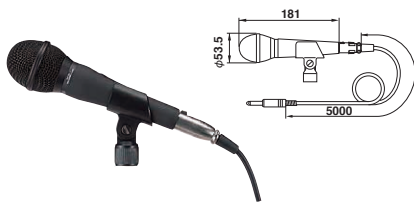

**Impedance** 500Ω, Balanced  
**Sensitivity** -55dB  
**Frequency response** 60Hz~15kHz  
**Directional** Uni-directional  
**Finish** (All metal): Black  
**Mass** Approx. 280g

### MD-57

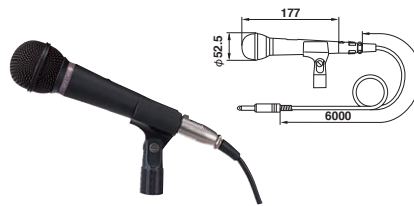


**Impedance** 600Ω, Balanced  
**Sensitivity** -53dB  
**Frequency response** 50Hz~12kHz  
**Directional** Uni-directional  
**Finish** (All metal): Black  
**Mass** Approx. 268g

### MD-56




**Impedance** 600Ω, Balanced  
**Sensitivity** -52dB  
**Frequency response** 50Hz~15kHz  
**Directional** Uni-directional  
**Finish** (All metal): Metallic gray  
**Mass** Approx. 260g

### MD-56T

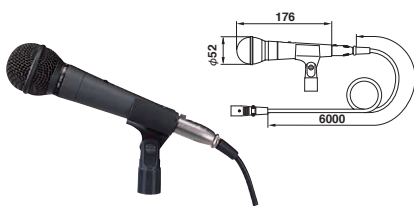


**Impedance** 600Ω, Balanced  
**Sensitivity** -52dB  
**Frequency response** 50Hz~15kHz  
**Directional** Uni-directional  
**Finish** (All metal): Metallic gray  
**Mass** Approx. 260g

### MD-55

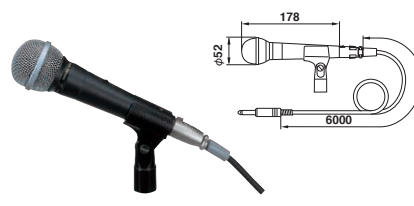


**Impedance** 600Ω, Balanced  
**Sensitivity** -52dB  
**Frequency response** 100Hz~10kHz  
**Directional** Uni-directional  
**Finish** (All metal): Metallic gray  
**Mass** Approx. 239g

### MD-53

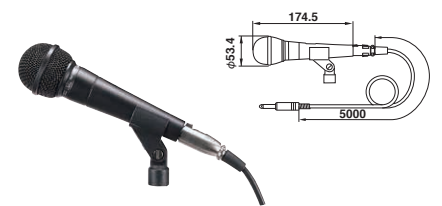


**Impedance** 600Ω, Balanced  
**Sensitivity** -56dB  
**Frequency response** 70Hz~12kHz  
**Directional** Uni-directional  
**Finish** (All metal): Black  
**Mass** Approx. 250g

### MD-46A

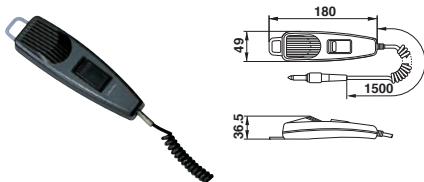


**Impedance** 600Ω, Unbalanced  
**Sensitivity** -51dB  
**Frequency response** 100Hz~7kHz  
**Directional** Uni-directional  
**Finish** (ABS resin): Metallic gray  
**Mass** Approx. 135g

### MD-48

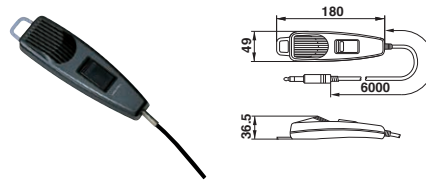

**Impedance** 600Ω, Unbalanced  
**Sensitivity** -51dB  
**Frequency response** 100Hz~7kHz  
**Directional** Uni-directional  
**Finish** (ABS resin): Metallic gray  
**Mass** Approx. 320g (including code)


### MD-5A

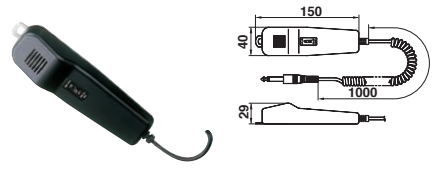

**Impedance** 600Ω, Unbalanced  
**Sensitivity** -53dB  
**Frequency response** 300Hz~7kHz  
**Directional** Uni-directional  
**Finish** (ABS resin): Black  
**Mass** Approx. 130g


## Desktop type Microphone

### MD-23SA (Differential type)

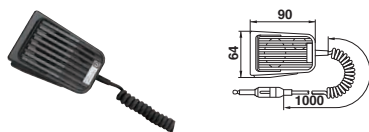

**Impedance** 600Ω, Unbalanced  
**Sensitivity** -55dB  
**Frequency response** 200Hz~4kHz  
**Directional** Uni-directional  
**Finish** (ABS resin): Dark gray  
**Mass** Approx. 190g


### MD-33

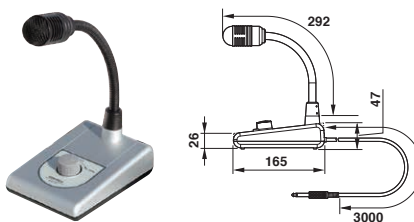

**Impedance** 600Ω, Unbalanced  
**Sensitivity** -52dB  
**Frequency response** 80Hz~12kHz  
**Directional** Uni-directional  
**Finish** Body (Zinc die-casting): Metallic light gray  
**Mass** Approx. 1.0kg (without cable)

## Chime Microphone

### MC-301

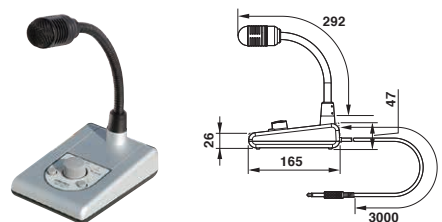

**Power supply** DC 7.5V (supplied from AC adaptor)  
**Chime** 440Hz/554Hz/659Hz/880Hz  
**Impedance** 600Ω Unbalanced  
**Output level** MIC: -66dBV/-82dBV/-62dBV  
 Chime: -45dBV/-35dBV  
**Directional** Uni-directional  
**Finish** Body (Zinc die-casting): Metallic light gray  
**Mass** Approx. 1.0kg (without cable)

## Extension cords

### LM-105 <LM-110, LM-120>



**Impedance** 600Ω, Balanced  
**Connector** XLR type plug  
**Cord length** 5m  
 10m <LM-110>  
 20m <LM-120>  
**Mass** Approx. 270g  
 Approx. 470g <LM-110>  
 Approx. 900g <LM-120>

### LM-10



**Impedance** 600Ω, Unbalanced  
**Connector** Phone type plug  
**Cord length** 10m  
**Mass** Approx. 340g

## Microphone Holder

### MDH-1



**Microphone diameter** Φ18~Φ35 mm  
**Mass** Approx. 55g

## Microphone Stands

### MT-89



**Adjustable height** 890~1590 mm  
**Mass** Approx. 2.0kg

### MT-96 (Free-stop type)



**Adjustable height** 955~1640 mm  
**Mass** Approx. 2.5kg

### MT-169 (Stand with Boom)



**Adjustable height** 990~1720 mm  
**Mass** Approx. 2.7kg

### MT-35



**Adjustable height** 233~350 mm  
**Mass** Approx. 1.1kg

## Microphone Connector Plates

### JPP-101A



**Connector** Phone type plug  
**Finish** (Aluminum alloy)  
**Dimensions** 70(W) x 120(H) x 37(D) mm  
**Mass** Approx. 35g

### JP-101F



**Connector** Phone type plug  
**Finish** (ABS resin): Ivory  
**Dimensions** 48(W) x 110(H) x 40(D) mm  
**Mass** Approx. 40g

### JX-103F



**Connector** XLR type plug (Male)  
**Finish** (ABS resin): Ivory  
**Dimensions** 48(W) x 110(H) x 44.1(D) mm  
**Mass** Approx. 70g

### JX-113F



**Connector** XLR type plug (Female)  
**Finish** (ABS resin): Ivory  
**Dimensions** 48(W) x 110(H) x 39.3(D) mm  
**Mass** Approx. 60g

## Panel for Connectors

### PT-2SKA



**Finish** (Aluminum)  
**Dimensions** 70(W) x 120(H) x 6.6(D) mm  
**Mass** Approx. 22g

## Connector Box

### ATB-22



**Finish** (ABS resin)  
**Dimensions** 70.5(W) x 120(H) x 40(D) mm  
**Mass** Approx. 55g

## Floor Consent Box

### JFB-200



**Applicable connector** XLR type plug  
**Finish** Plate (Aluminum diecasting): Metallic silver  
 Box (Steel plate): Black  
**Dimensions** 179(W) x 149(H) x 158(D) mm  
**Mass** Approx. 1.5kg