

# Specification

**UNI-PEX**

No.1

## WIRELESS SIMPLE RECEIVER

### WR-3000

RECEIVING FREQUENCY	322.025MHz~322.150MHz, 322.250MHz~322.400MHz (13 channels at 25kHz intervals)
RECEIVING SCHEME	PLL control superheterodyne
RECEIVER SENSITIVITY	23dB $\mu$ V or less (S/N 50dB $\pm$ 2.25kHzFM)
SQUELCH SENSITIVITY	18dB $\mu$ V
INDICATOR	2 color LED $\times$ 2 / Stand by: LED (Red), Receiving: LED(Green)
RATED OUTPUT	-20dBV / -60dBV selectable 600 $\Omega$ Balanced (with balanced plug)
DISTORTION	3% or less ( $\pm$ 8kHzFM)
FREQUENCY RESPONSE	50Hz~7kHz (1kHz basis, 50 $\mu$ s emphasis)
POWER SUPPLY	R6P (AA size battery) $\times$ 3, 4.5V External power supply: DC6V~32V
CURRENT CONSUMPTION	Approx. 40mA
BATTERY LIFE	Approx. 15 hours (at normal temperature, continuous operation)
TEMPERATURE RANGE	0 $^{\circ}$ C~+40 $^{\circ}$ C
DIMENSIONS	90(W) $\times$ 190(H) $\times$ 47(D) mm
MASS	Approx. 280g (without battery)
FINISH	(ABS resin): Dark gray (Munsell N3 approx.)
ACCESSORIES	Channel setting driver $\times$ 1, R6P (AA size battery) $\times$ 3, Screw ( $\phi$ 3 $\times$ 10) $\times$ 1 Cord with phone plug (1m) $\times$ 1, Clip $\times$ 1, Instruction manual $\times$ 1

BUSINESS


AJ07

# Specification

# UNI-PEX

No. 2

WIRELESS RECEIVER  
WR-3000

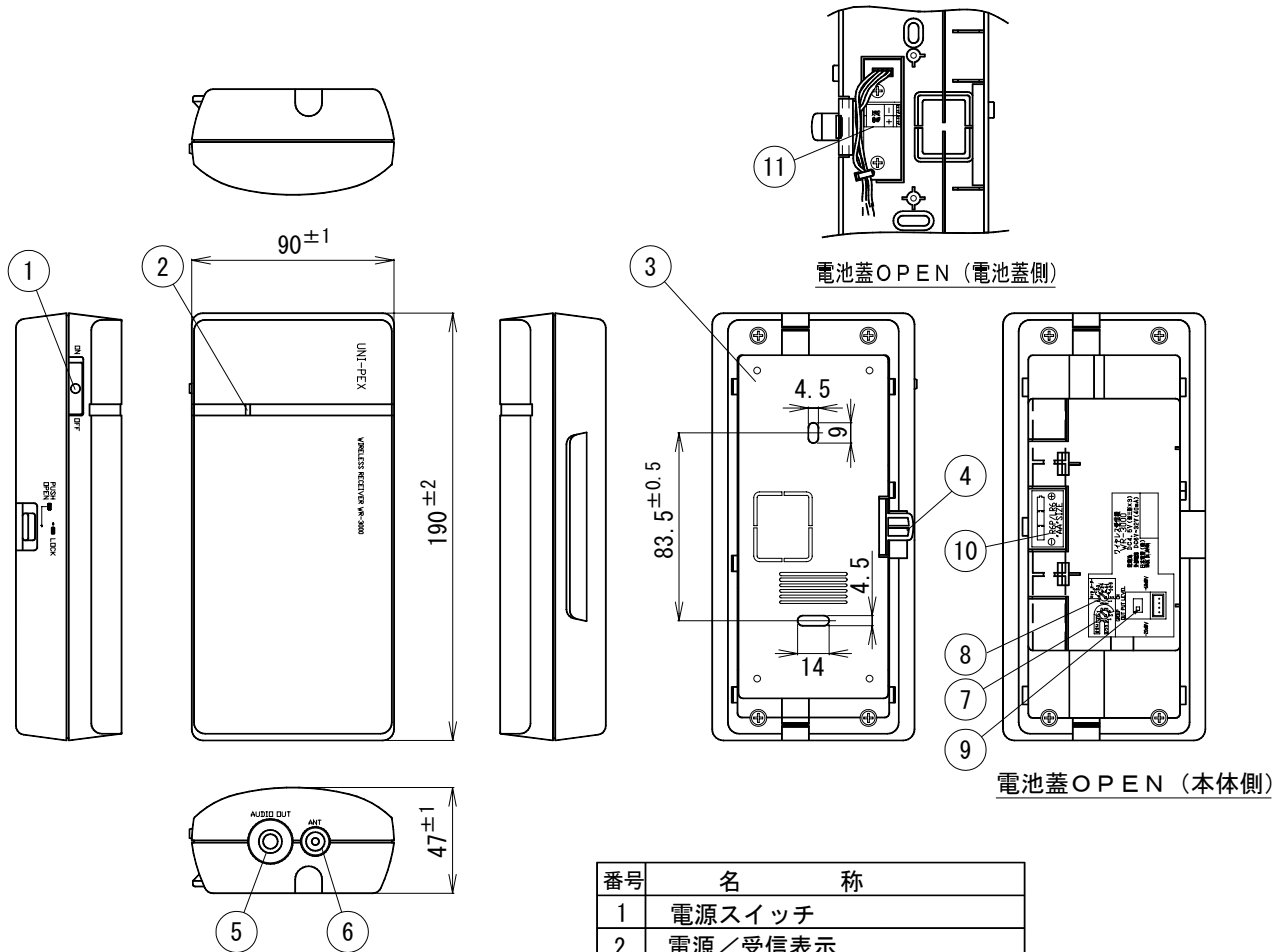

番号	名 称
1	電源スイッチ
2	電源／受信表示
3	電池蓋
4	電池蓋ロック解除ボタン
5	音声出力ジャック
6	外部アンテナ入力ジャック
7	グループ切換設定スイッチ
8	チャンネル切換設定スイッチ
9	音声レベル切換スイッチ
10	乾電池収納部 (単三×3)
11	電源入力端子

Unit: mm

BUSINESS

AJ07

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社