


## DIVERSITY WIRELESS TUNER UNIT

### DU-3200A

POWER SUPPLY	DC12V (Supplied from built-in equipment)
CURRENT CONSUMPTION	Approx. 100mA
RECEIVING FREQUENCY	322.025MHz~322.150MHz, 322.250MHz~322.400MHz (13 channels at 25kHz intervals)
RECEIVING SCHEME	PLL control superheterodyne
RECEIVER SENSITIVITY	20dB $\mu$ V or less (S/N 45dB $\pm$ 2.25kHzFM)
SQUELCH SENSITIVITY	21dB $\mu$ V
INDICATOR	2 color LED $\times$ 2 Stand by: LED (Red) Receiving: Selected carrier/ LED(Green), Non-selected carrier/ LED(Red)
RATED OUTPUT	-20dBV
DISTORTION	3% or less (at $\pm$ 8kHzFM)
FREQUENCY RESPONSE	50Hz~7kHz (at 1kHz basis, 50 $\mu$ s emphasis)
TEMPERATURE RANGE	0°C~+40°C
FINISH	Panel (ABS resin): Black (Munsell approx.N1) Case (Steel plate)
DIMENSIONS	84(W) $\times$ 30(H) $\times$ 148(D) mm
MASS	Approx. 200g
ACCESSORIES	Instruction manual x1, Setting driver x1

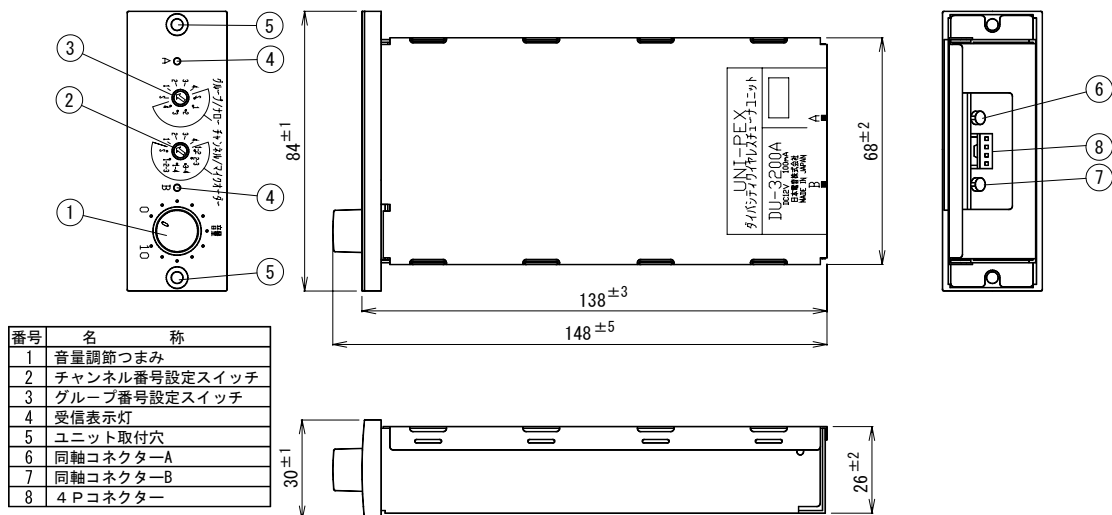

Unit: mm

BUSINESS

JH06