BNC TYPE CONNECTOR

AW-01


IMPEDANCE 50Ω (75 Ω)


VOLTAGE STANDING WAVE RATIO 1.3 or below (100MHz~500MHz)

 $\begin{array}{lll} \text{INSULATION RESISTANCE} & 1000\text{M}\,\Omega & (500\text{V DC}) \\ \text{WITHSTAND VOLTAGE} & 1500\text{V AC per minute} \\ \text{CONTACT RESISTANCE} & \text{Center: } 3\text{m}\,\Omega & \text{or below} \end{array}$

External: 1m Ω or below

APPLICABLE CABLE 3C-2V(When the sleeve has attached), 5C-2V, 5C-FB(When the sleeve has removed)



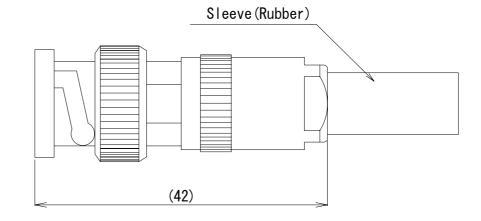

UNIT: mm

BUSINESS

JG10