


WIRELESS ANTENNA DISTRIBUTOR

DWD-8240

POWER SUPPLY	AC100V 50/60Hz
POWER CONSUMPTION	12W
PASSING FREQUENCY BAND	806~810MHz
PASSING LOSS	FIELD SELECT: WIDE (+6dB) NORMAL (0dB)
NOISE FIGURE	10dB or less (FIELD SELECT: WIDE)
ANTENNA INPUT	50Ω~75Ω (BNC) 2 input, 2 system (α1, α2, β1, β2) Phantom power output: DC9V~12V 70mA (×4)
ANTENNA OUTPUT	50Ω~75Ω (BNC) 4 distribution 2 system (α1~4, β1~4)
ANTENNA OPERATION INDICATOR	2 color LED (×4)
FIELD SELECT	Normal: Green / Short circuit: Red / Disconnection or No connection: None WIDE/NORMAL
ANTENNA SENSITIVITY SETTING	+6dB/0dB/-6dB (α1, α2, β1, β2) (Gain switch by phantom power voltage)
TEMPERATURE RANGE	-10°C~+50°C
FINISH	Panel (Steel plate): Black (Munsell N1 approx.) Cover (Vinyl laminated steel plate): Black (Munsell N1 approx.)
DIMENSIONS	420(W) x 45(H) x 216(D) mm
MASS	Approx. 3kg
ACCESSORIES	Instruction manual x1

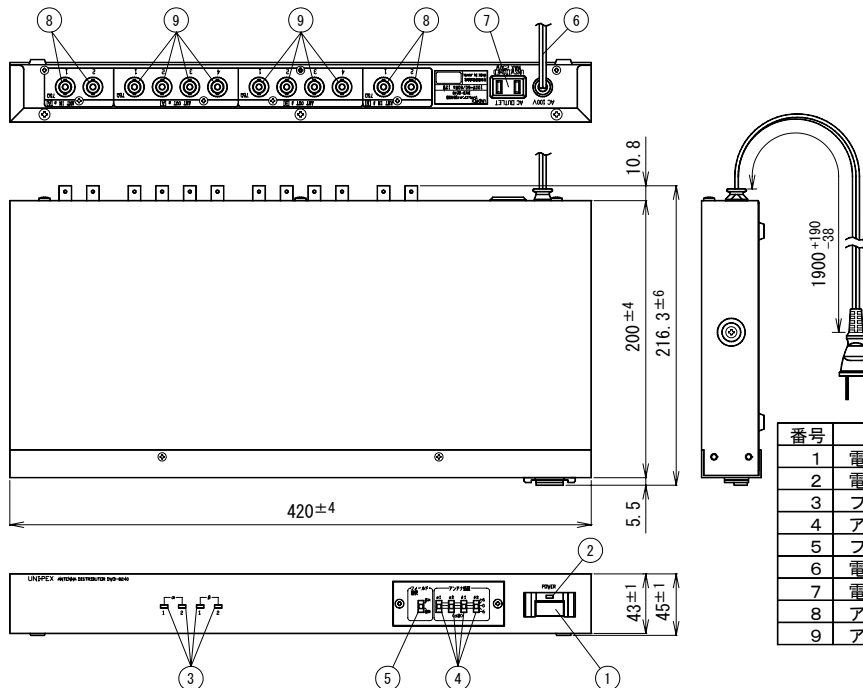

Unit: mm

BUSINESS

JE04