

# Specification

**UNI-PEX**

No.1

## MICROPHONE MIXER

### MX-192

POWER SUPPLY	AC100V 50/60Hz
POWER CONSUMPTION	5.2W
CURRENT CONSUMPTION	AC 84mA
RATED OUTPUT	0dBV 600Ω Balanced (Possible to change -20dBV or -50dBV by switch) Phone jack
RECORDING OUTPUT	0dBV 600Ω Unbalanced (Possible to change -20dBV by internal jumper pin) Pin jack × 2
DISTORTION	1% or less
FREQUENCY RESPONSE	50Hz~20kHz±3dB (1kHz basis)
INPUT SENSITIVITY AND IMPEDANCE	Input 1~3: -62dBV±3dB 600Ω Electronic balanced (Possible to install insulated transformer) with volume control Phone jack (Possible to change -22dBV or -2dBV) Input 4~5: -62dBV±3dB 600Ω Electronic balanced (Possible to install insulated transformer) with volume control Phone jack (Possible to change -22dBV or -2dBV) -12dBV ±3dB 10kΩ Unbalanced, Pin jack × 2 (Possible to mix Phone jack and pin jack) Input 6 : -62dBV±3dB 600Ω Electronic balance (Possible to install insulated transformer) with volume control Phone jack (Possible to change -22dBV or -2dBV) -22dBV ±3dB 10kΩ Unbalanced, Pin jack × 2 (Possible to mix Phone jack and pin jack) Input 7 : -2dBV±3dB 600Ω Unbalanced, Phone jack
S/N RATIO	60dB or more
TEMPERATURE RANGE	-10°C~+50°C
INDICATION	Power: LED(Green) Output: Proper/ LED(Green) Excessive/ LED(Red)
FINISH	Panel(Steel plate): Semi-matt black, Munsell N1 approx. Cover(Vinyl laminated steel plate): Black, Munsell N1 approx.
DIMENSIONS	424(W) x 44(H) x 287(D) mm
MASS	Approx. 3kg
ACCESSORY	AC power cable(2m) × 1
APPLICABLE PRODUCT	Insulated transformer LT-16 Rack mounting braket EEP-44

See No.2

BUSINESS





AA05

# Specification

# UNI-PEX

No. 2

MICROPHONE MIXER  
MX-192

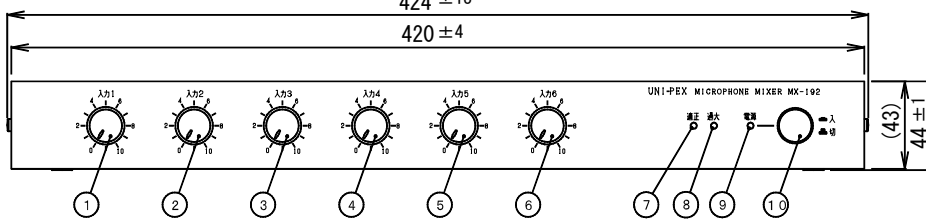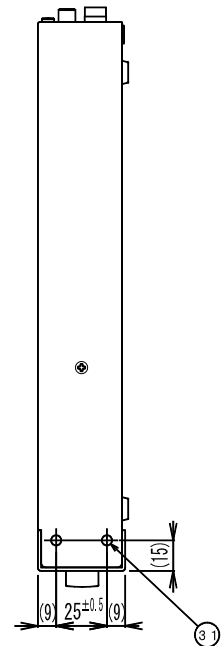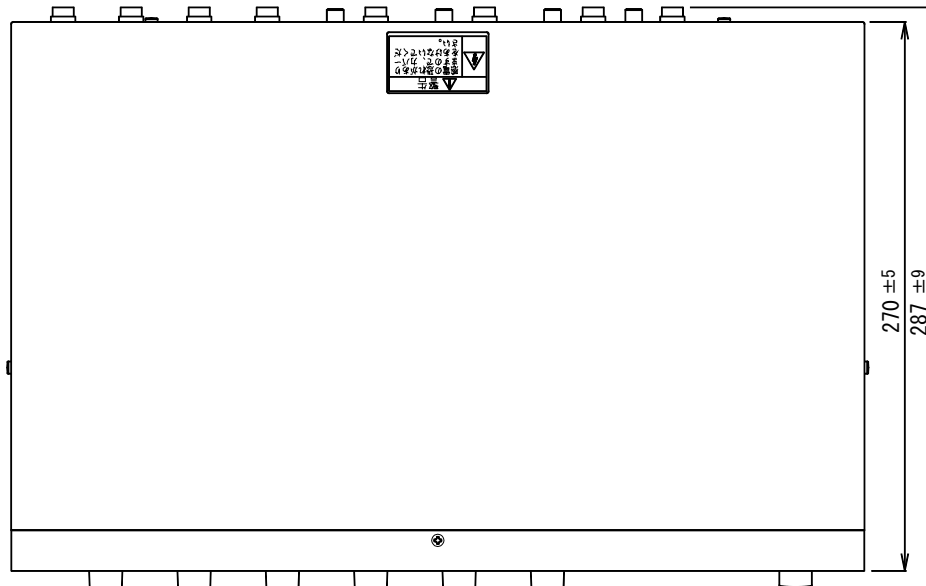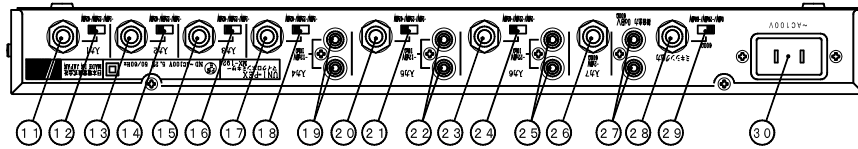

番号	名称	番号	名称
1	入力1 音量調節つまみ	17	入力4 入力ジャック
2	入力2 音量調節つまみ	18	入力4 入力感度切換スイッチ
3	入力3 音量調節つまみ	19	入力4 入力ピンジャック
4	入力4 音量調節つまみ	20	入力5 入力ジャック
5	入力5 音量調節つまみ	21	入力5 入力感度切換スイッチ
6	入力6 音量調節つまみ	22	入力5 入力ピンジャック
7	適正表示 (緑)	23	入力6 入力ジャック
8	過大表示 (赤)	24	入力6 入力感度切換スイッチ
9	電源表示灯 (緑)	25	入力6 入力ピンジャック
10	電源スイッチ	26	入力7 入力ジャック
11	入力1 入力ジャック	27	録音出力ピンジャック
12	入力1 入力感度切換スイッチ	28	ミキシング出力ジャック
13	入力2 入力ジャック	29	ミキシング出力感度切換スイッチ
14	入力2 入力感度切換スイッチ	30	ACインレット
15	入力3 入力ジャック	31	ラックマウント金具取付穴
16	入力3 入力感度切換スイッチ		

Unit: mm

BUSINESS

AA05

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社