


Specification

UNI-PEX

CABINET SPEAKER

CS-289A

RATED INPUT	6W/2W
IMPEDANCE	1.7kΩ (6W)/5kΩ (2W) <High Impedance 100 Line>
SOUND PRESSURE LEVEL	91dB (at Speaker one side, 1m, 1W input)
FREQUENCY RESPONSE	100Hz~15kHz (Deviation 20dB at Speaker one side, 1m, 1W input)
FINISH	Cabinet (MDF): Ivory (Munsell 5.5Y8.6/1.2 approx.) Baffle (Jersey-net): Gray
DIMENSIONS	290(W) × 291(H) × 180(D) mm
MASS	Approx. 3.1kg
ACCESSORIES	Bind Screw(M4 × 14) × 2, Wood Screw(φ 4 × 20) × 2, Instruction Manual × 1

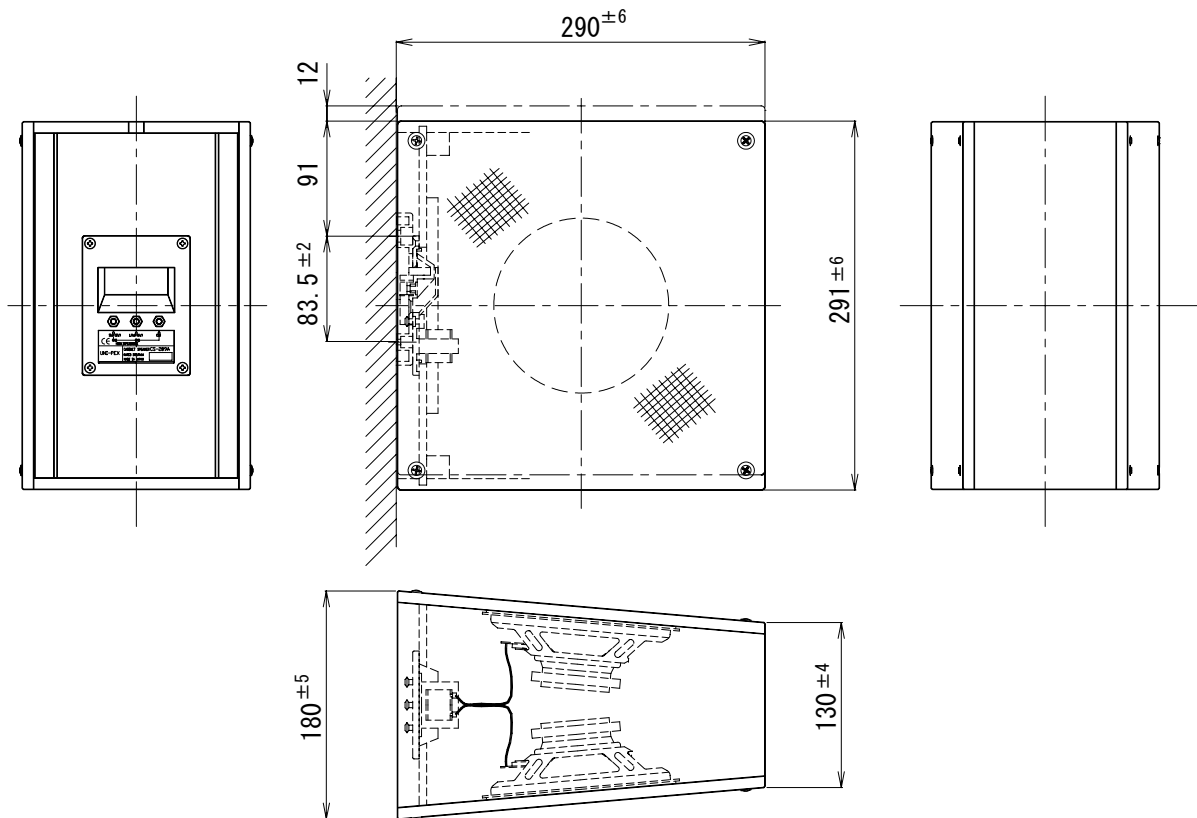

UNIT: mm

BUSINESS

J108

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社