


CABINET SPEAKER

CS-303L

RATED INPUT	3W
IMPEDANCE	3.3k Ω (3W) <High Impedance 100V Line>
SOUND PRESSURE LEVEL	92dB (at 1m, 1W input)
FREQUENCY RESPONSE	150Hz~15kHz (Deviation 20dB)
ATTENUATION	0: OFF, 1: -12dB, 2: -6dB, 3: 0dB
FINISH	Cabinet (ABS resin): Light gray (Munsell 5GY8/0.5 approx.) Back panel (ABS resin): Black (Munsell N1 approx.)
DIMENSIONS	290(W) × 217(H) × 98.5(D) mm
MASS	Approx. 1.2kg
ACCESSORIES	Wood Screw($\phi 4 \times 38$) × 2, Instruction Manual × 1

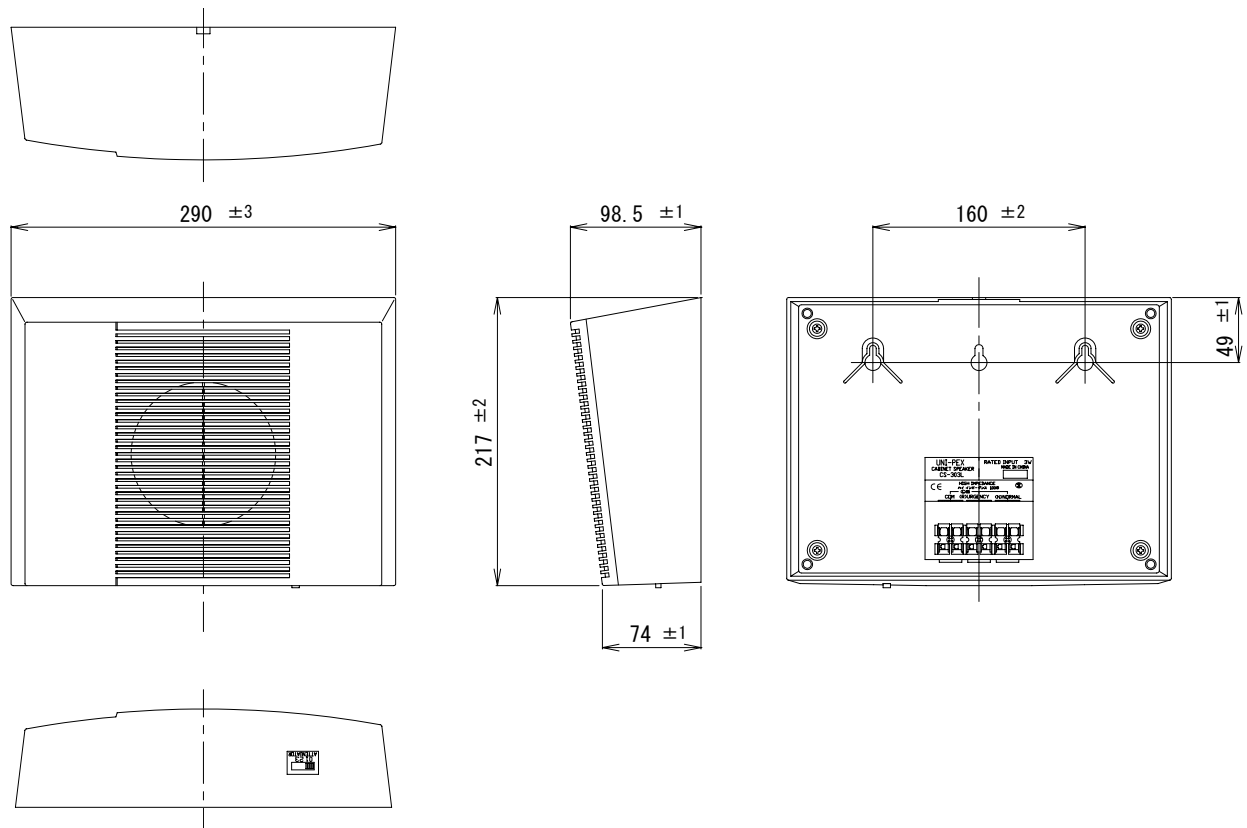

UNIT: mm

BUSINESS

JH06

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社