


COMBINATION SPEAKER WITH BUILT-IN TRANSFORMER

CT-380A/20

RATED INPUT	20W
IMPEDANCE	500 Ω (20W)/1k Ω (10W)/ 2k Ω (5W) <High Impedance 100V Line>
SOUND PRESSURE LEVEL	106dB (at 1m, 1W input)
FREQUENCY RESPONSE	250Hz~8kHz (Deviation 20dB)
FITTINGS	U-shape Bracket, L-size
FINISH	Horn Mouth: (Aluminum), Approx. Light Gray (Munsell N7.0) Reflector: (ABS Resin), Approx. Light Gray (Munsell N7.0) Cover: (ABS Resin), Approx. Gray (Munsell N4.0) Bracket: (SPHC), Hot Dip Zincing
MASS	Approx. 3kg
DIMENSIONS	ϕ 380 (Diam.) $\times$ 399 (Length) mm
ACCESSORIES	Exclusive Cord with Plug (Approx. 50cm) $\times$ 1, Instruction Manual $\times$ 1
APPLICABLE STANDARD	JIS C 0920 (=IEC 60529) Degrees of protection provided by enclosures (IP code)

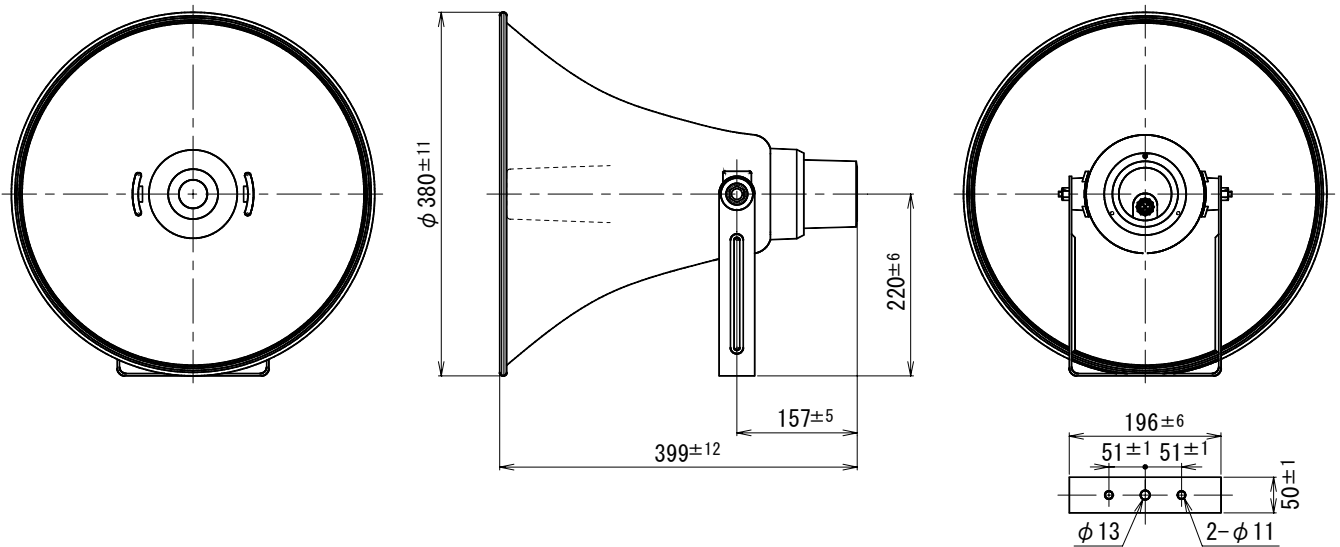

UNIT: mm

BUSINESS

JH01

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社