


## 300MHz DIVERSITY WIRELESS TUNER UNIT

### DU-350

POWER SUPPLY	DC12V (Supplied from built-in equipment)
CURRENT CONSUMPTION	Approx. 100mA
RECEIVING FREQUENCY	322.025MHz~322.150MHz, 322.250MHz~322.400MHz (13 channels at 25kHz interval)
RECEIVING SCHEME	PLL control superheterodyne
RECEIVING SENSITIVITY	20dB $\mu$ V or less (S/N 45dB at $\pm$ 2.25kHzFM)
SQUELCH SENSITIVITY	29dB $\mu$ V
RATED OUTPUT	-20dBV
DISTORTION	3% or less (at $\pm$ 8kHzFM)
FREQUENCY RESPONSE	50Hz~7kHz (at 1kHz basis, 50 $\mu$ s emphasis)
FINISH	Case (Plating steel)
DIMENSIONS	63(W) x 16(H) x 122(D) mm
MASS	Approx. 140g
ACCESSORIES	Channel setting driver x 1, Instruction manual x 1
APPLICABLE MICROPHONE	UNI-PEX 300MHz band wireless microphone
APPLICABLE PRODUCT	Wireless amplifier WA-3621A series

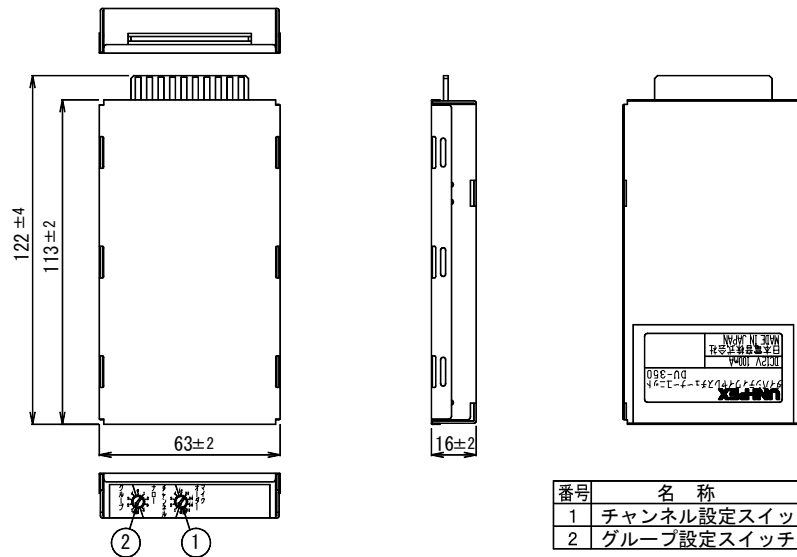

番号	名称
1	チャンネル設定スイッチ
2	グループ設定スイッチ

Unit: mm

BUSINESS