

Specification

UNI-PEX

No.1

DESK-TOP PA AMPLIFIER

GZ-60

POWER SOURCE	AC 127V or 220V (with voltage selector switch) 50/60Hz / 28V DC (24V DC battery)
POWER CONSUMPTION	160W (rated output), 80W (EN60065)
CURRENT CONSUMPTION	Under 100mA (when power switch is OFF), 4.8A (DC power / rated output)
OUTPUT	Rated: 60W/ Max: 100W
OUTPUT LOAD IMPEDANCE	Speaker out: 4Ω (Low impedance), unbalanced 167Ω (High impedance 100V line), balanced REC out: 0dBV, 600Ω, unbalanced LINE out: 0dBV, 600Ω, unbalanced
DISTORTION FACTOR	1% or less (at 1kHz, rated output)
FREQUENCY RESPONSE	50Hz~20kHz, deviation ±3dB
TONE CONTROL	Bass: ±10dB at 100Hz (1kHz standard) Treble: ±10dB at 10kHz (1kHz standard)
INPUT SENSITIVITY AND IMPEDANCE	MIC 1: -62dBV, 600Ω, electronically-balanced, volume control provided MIC 2: -62dBV, 600Ω, electronically-balanced, volume control provided MIC 3: -62dBV, 600Ω, electronically-balanced, volume control provided MIC 4: -62dBV, 600Ω, electronically-balanced, volume control provided MIC 5: -62dBV, 600Ω, electronically-balanced, volume control provided MIC 6: -62dBV, 600Ω, electronically-balanced, volume control provided AUX 1: -22dBV, 10kΩ, electronically-balanced, volume control provided AUX 2: -22dBV, 10kΩ, electronically-balanced, volume control provided TAPE: -22dBV, 10kΩ, unbalanced, volume control provided CD: -16dBV, 10kΩ, unbalanced, volume control provided (Either MIC 3 or AUX 1, and either MIC 4 or AUX 2, and either MIC 5 or TAPE, and MIC 6 or CD selectable by each switches)
S/N RATIO	POWER: 0dBV, 600Ω, unbalanced 60dB or more
PERFORMANCE INDICATION	Power indicator: LED (Green) Output level meter: 5-point LED (Green x3, Yellow x1, and Red x1) Zone indicator: LED (Green)
TEMPERATURES RANGE	-10°C~+50°C
FINISH	Front panel (Aluminum): Half-matt black (Munsell approx.N1) Rear panel (Steel) Cover (Steel): Half-matt black (Munsell approx.N1)
DIMENSION	430(W) × 99(H) × 308(D) mm
MASS	Approx. 7.6kg

Please see together with the external views of No.2

BUSINESS

JG12

Subject to change for improvement without notice.





製造元 日本電音株式会社 販売元 ユニペックス株式会社

Specification

UNI-PEX

No. 2

DESK-TOP PA AMPLIFIER
GZ-60

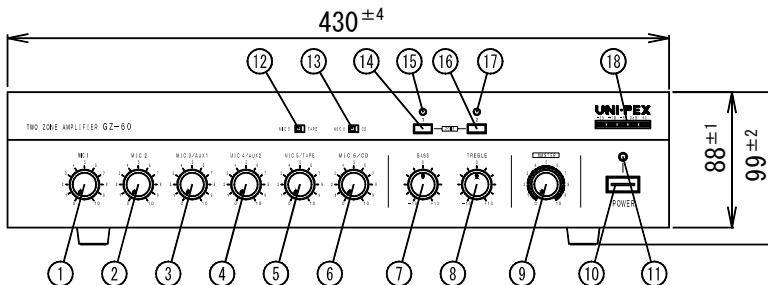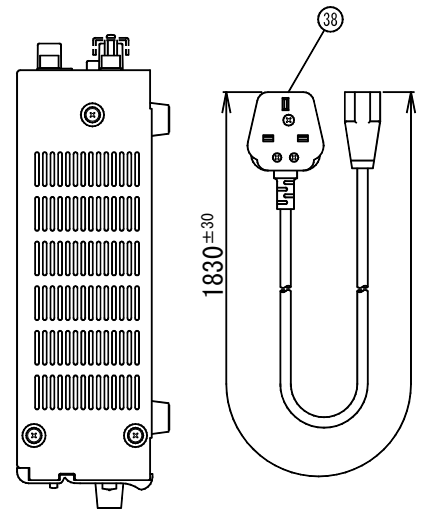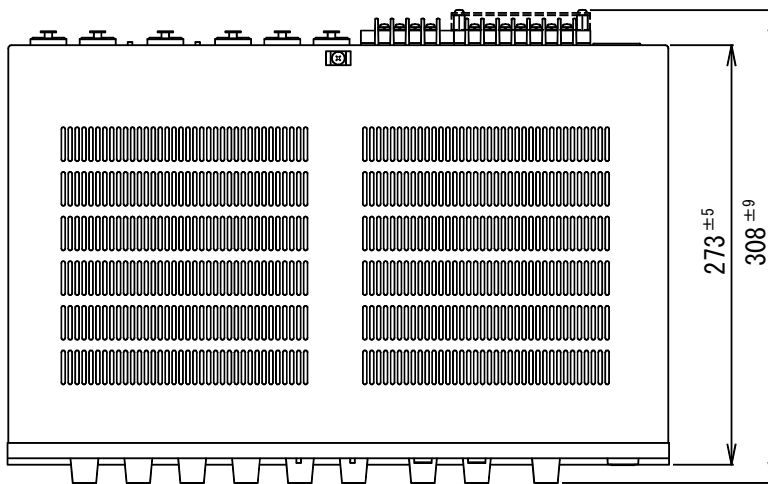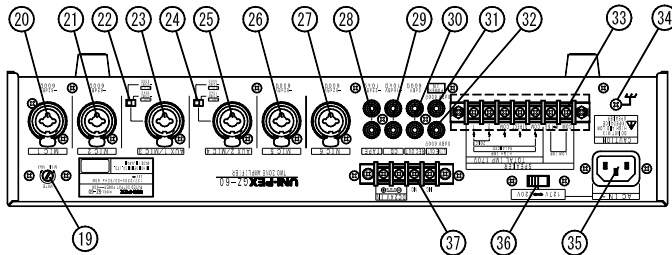

1	MIC 1 Volume control	16	ZONE 2 selector switch	31	POWER-IN jack
2	MIC 2 Volume control	17	ZONE 2 pilot lamp	32	LINE-OUT jack
3	Volume control for MIC 3 and AUX1	18	Output level indicator	33	Speaker connection terminal
4	Volume control for MIC 4 and AUX2	19	MUTE volume control	34	Grand terminal
5	Volume control for MIC 5 and TAPE	20	MIC 1 input jack	35	AC input terminal
6	Volume control for MIC 6 and CD	21	MIC 2 input jack	36	Voltage selector switch
7	Bass control	22	MIC 3/ AUX 1 selector switch	37	DC (24V) input terminal
8	Treble control	23	MIC 3/ AUX 1 input jack	38	AC power code
9	Master volume	24	MIC 4/ AUX 2 selector switch		
10	Power switch	25	MIC 4/AUX 2 input jack		
11	Power pilot lamp	26	MIC 5 input jack		
12	MIC 5/TAPE selector switch	27	MIC 6 input jack		
13	MIC 6/CD selector switch	28	TAPE input jack		
14	ZONE 1 selector switch	29	CD input jack		
15	ZONE 1 pilot lamp	30	REC-OUT jack		

UNIT: mm

BUSINESS

JG12

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社