


# Specification

**UNI-PEX**

## 2-WAY SPEAKER

### HMS-120

RATED INPUT	120W(RMS/EIA) 240W(Continuous program)
IMPEDANCE	8Ω
SOUND PRESSURE LEVEL	93dB(at 1W/1m)
FREQUENCY RESPONSE	60Hz~20kHz
CROSSOVER FREQUENCY	6.5kHz
DIRECTIVE	100° x 100° (Horizontal x Vertical, 4kHz)
SPEAKER	Bass Φ 200mm cone type woofer Treble Φ 25mm dome tweeter
FINISH	Enclosure (PP resin): Half-matt Black (Munsell Approx. N1.5) Baffle (PP resin): Half-matt Black (Munsell Approx. N1.5) Grill screen (Punching metal): Half-matt Black (Munsell Approx. 1.5)
DIMENSIONS	245 (W) x 400(H) x 282(D) mm
MASS	Approx. 7.0kg
TEMPERATURE RANGE	-10°C ~ +55°C
ACCESSORIES	Instruction Manual x 1 Lubber cap x 8 Eyebolt for safety wire x 1

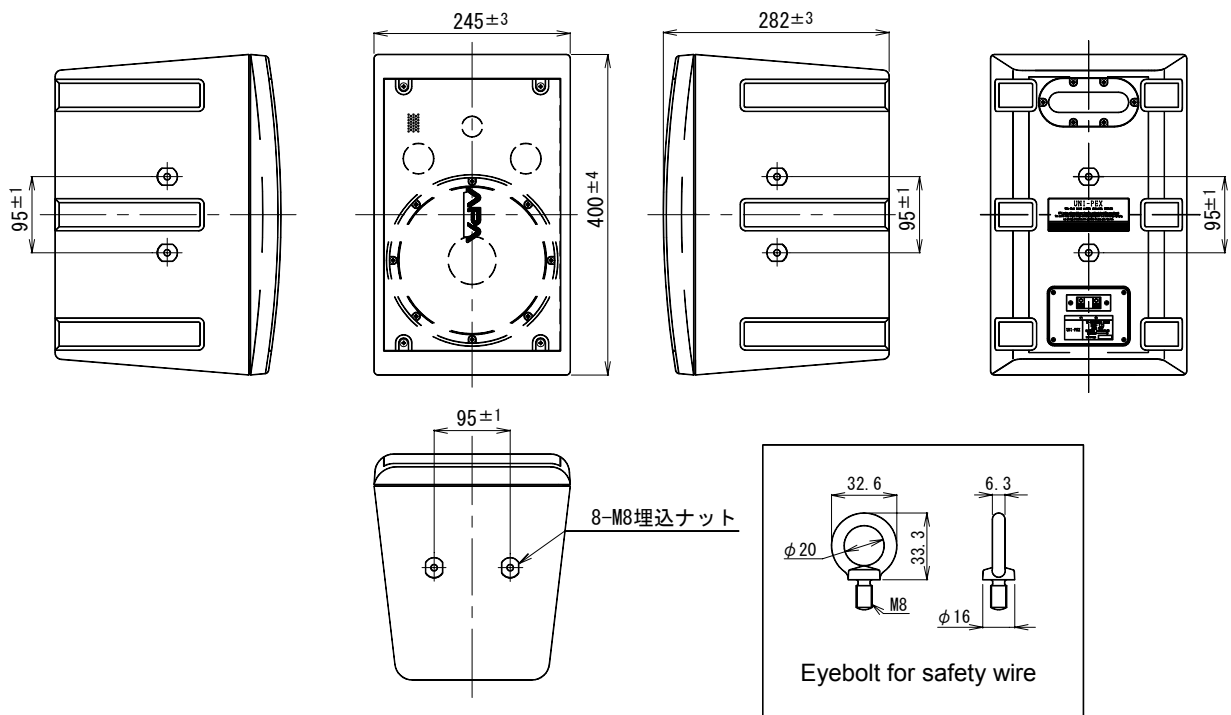

Unit: mm

**BUSINESS**

JH01

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社