


2-WAY SPEAKER with TRANSFORMER

HMS-120T

RATED OUTPUT	60W
IMPEDANCE	170Ω(60W), 330Ω(30W), 670Ω(15W) <100V Line>
SOUND PRESSURE LEVEL	93dB(at 1W/1m)
FREQUENCY RESPONSE	60Hz~20kHz
CROSSOVER FREQUENCY	6.5kHz
DIRECTIVE	100° x 100° (Horizontal x Vertical, 2kHz)
SPEAKER	Φ 200mm cone type woofer Φ 25mm dome tweeter
FINISH	Enclosure (PP resin): Half-matt Black (Munsell Approx. N1.5) Baffle (PP resin): Half-matt Black (Munsell Approx. N1.5) Grill screen (Punching metal): Half-matt Black (Munsell Approx. 1.5)
DIMENSIONS	245 (W) x 400(H) x 282(D) mm
MASS	Approx. 8.0kg
TEMPERATURE RANGE	-10°C ~ +55°C
ACCESSORIES	Instruction Manual x 1 Lubber cap x 8 Eyebolt for safety wire x 1

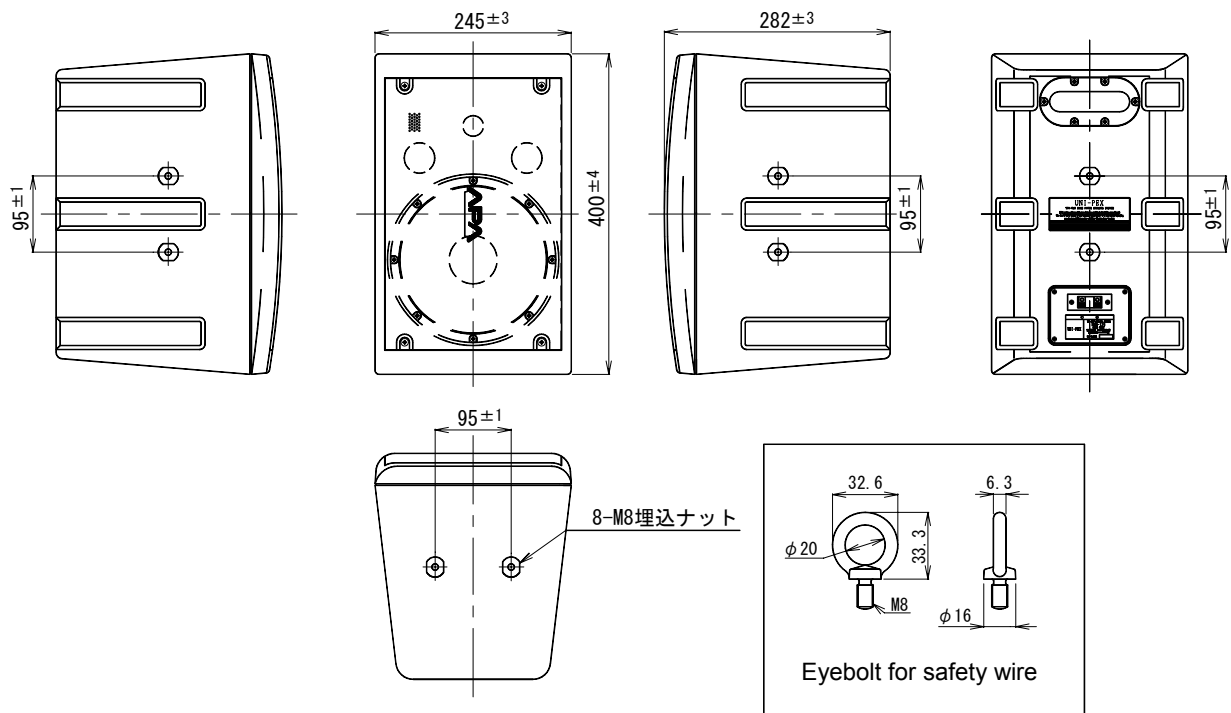

Unit: mm

BUSINESS

JH01