


WIDE RANGE SPEAKER

LHA-15T

RATED INPUT	15W
IMPEDANCE	670Ω (15W), 1kΩ (10W), 2kΩ (5W) High impedance 100V Line
SOUND PRESSURE LEVEL	101dB (at 1m/1W input)
FREQUENCY RESPONSE	150Hz~15kHz (Deviation 20dB)
FITTINGS	U-shape bracket, L-size
FINISH	Baffle (ABS Resin): Light gray (Munsell 2.5PB9/2 approx.) Case (ABS Resin): Light gray (Munsell 2.5PB9/2 approx.) Bracket (Stainless steel): Light gray (Munsell 2.5PB9/2 approx.) Punching net (Aluminum): Light gray (Munsell 2.5PB9/2 approx.) Screw (Stainless steel)
DIMENSIONS	Outside: 300(W) × 202(H) × 300(D) mm Caliber: 289(W) × 191(H) mm
MASS	Approx. 2.7kg
ACCESSORY	Outlet plug 1, Instruction manual 1
APPLICABLE STANDARD	IEC 60529 IPX4

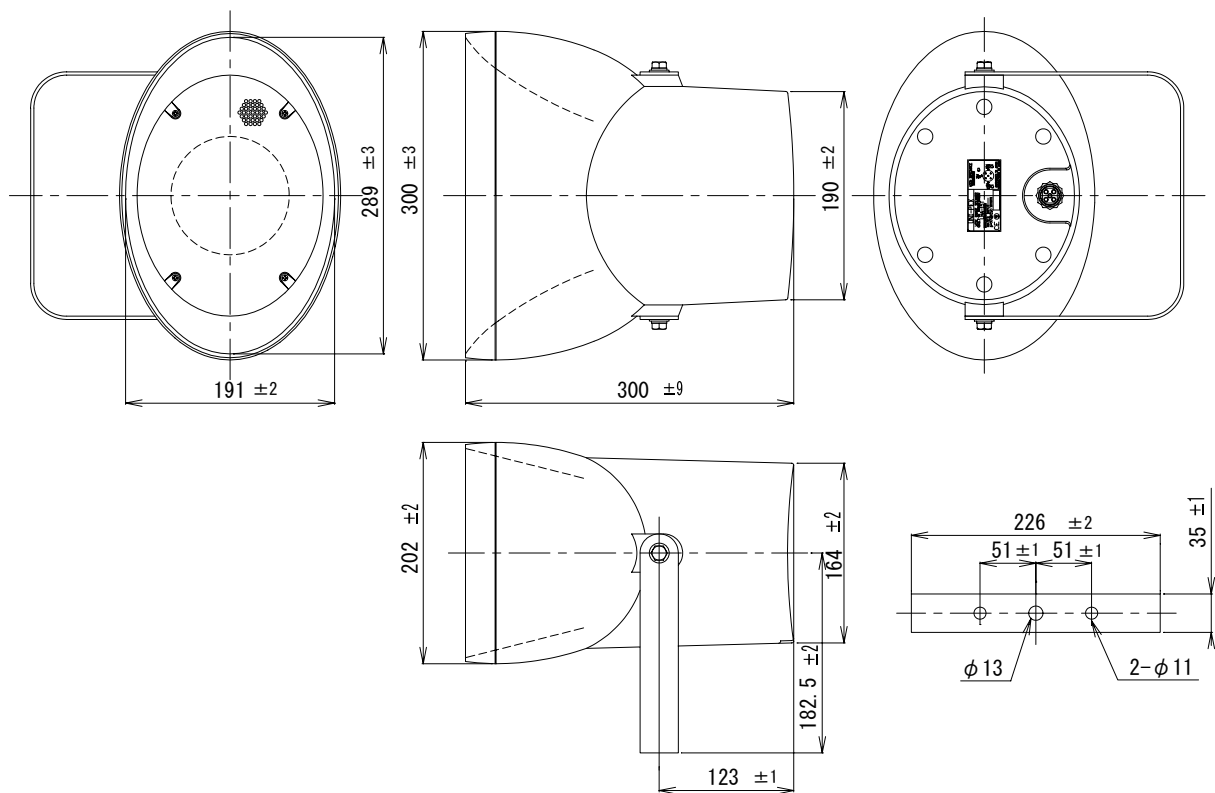

UNIT: mm

BUSINESS

JH06

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社