


Specification

UNI-PEX

WIDE RANGE SPEAKER

LHA-30T

RATED INPUT	30W
IMPEDANCE	330 Ω (30W), 500 Ω (20W), 1k Ω (10W) High impedance 100V Line
SOUND PRESSURE LEVEL	101dB (at 1m/1W input)
FREQUENCY RESPONSE	180Hz~15kHz (Deviation 20dB)
FITTINGS	U-shape bracket, L-size
FINISH	Baffle (ABS Resin): Light gray (Munsell 2.5PB9/2 approx.)
	Case (ABS Resin): Light gray (Munsell 2.5PB9/2 approx.)
	Bracket (Stainless steel): Light gray (Munsell 2.5PB9/2 approx.)
	Punching net (Aluminum): Light gray (Munsell 2.5PB9/2 approx.)
	Screw: (Stainless steel)
DIMENSIONS	Outside: 300(W) × 202(H) × 300(D) mm Caliber: 289(W) × 191(H) mm
MASS	Approx. 3.3kg
ACCESSORY	Outlet plug 1, Instruction manual 1
APPLICABLE STANDARD	IEC 60529 IPX4

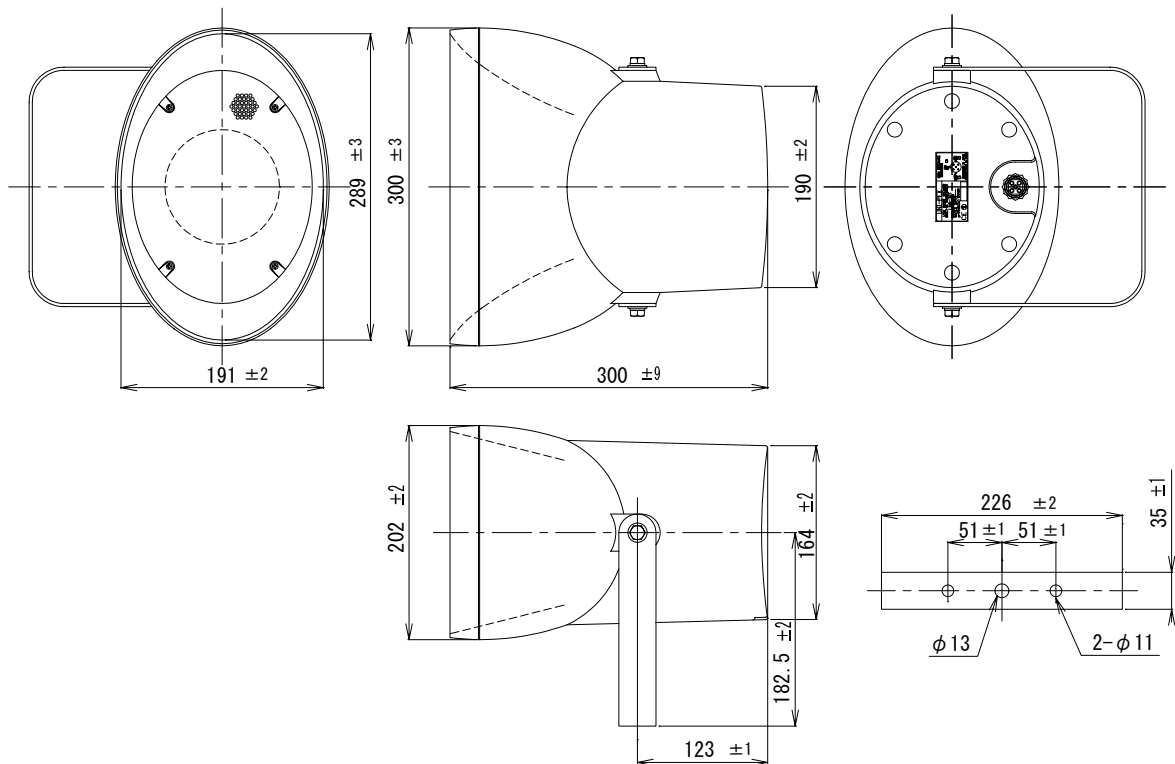

UNIT: mm

BUSINESS

JH06

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社