


Specification

UNI-PEX

WIDE RANGE SPEAKER

LHA-6T

RATED INPUT	6W
IMPEDANCE	1.7k Ω (6W), 3.3k Ω (3W), 10k Ω (1W) High impedance 100V Line
SOUND PRESSURE LEVEL	96dB (at 1m/1W input)
FREQUENCY RESPONSE	150Hz~13kHz (Deviation 20dB)
FITTINGS	U-shape bracket, S-size
FINISH	Baffle (ABS Resin): Light gray (Munsell 2.5PB9/2 approx.) Case (ABS Resin): Light gray (Munsell 2.5PB9/2 approx.) Bracket (Stainless steel): Light gray (Munsell 2.5PB9/2 approx.) Punching net (Aluminum): Light gray (Munsell 2.5PB9/2 approx.) Screw (Stainless steel)
DIMENSIONS	Outside: 220(W) × 165(H) × 195(D) mm Caliber: 210(W) × 155(H) mm
MASS	Approx. 1.5kg
ACCESSORY	Outlet plug 1, Instruction manual 1
APPLICABLE STANDARD	IEC 60529 IPX4

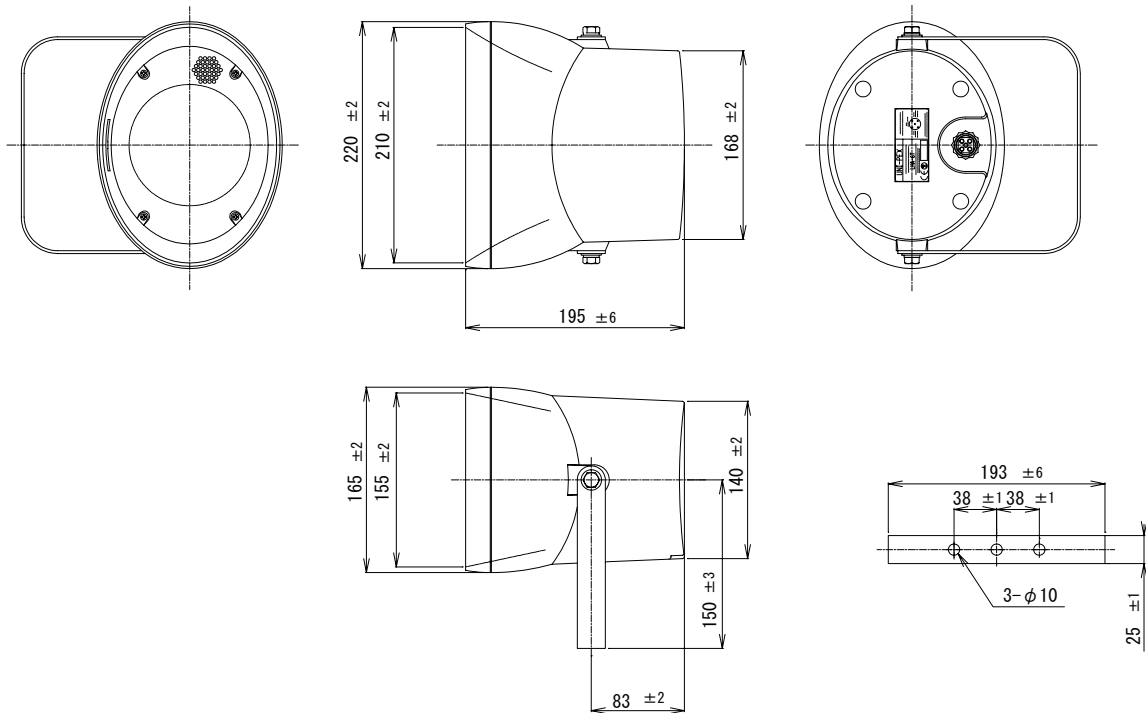

UNIT: mm

BUSINESS

JH06

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社