
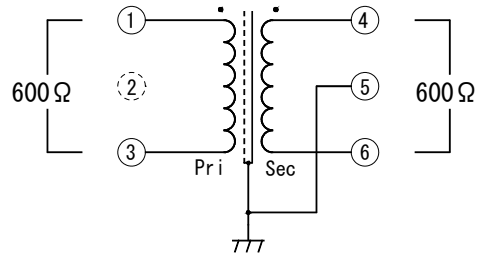



BALANCED TRANSFORMER

LT-16

INPUT IMPEDANCE	600 Ω (at 1kHz)
OUTPUT IMPEDANCE	600 Ω (at 1kHz)
FREQUENCY RESPONSE	20Hz~20kHz Deviation ±1dB (at 1V input)
DISTORTION FACTOR	1% or less (20Hz~20kHz, at 0.5V input)
INSERTION LOSS	4dB or less (at 1 kHz)
DIMENSIONS	φ 24.5 (Daim.) × 24 (H) mm
MASS	Approx. 35g

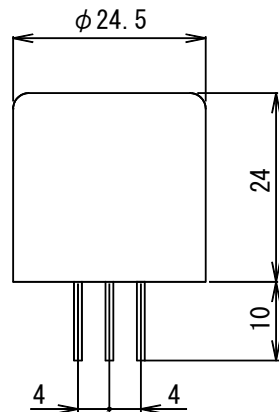

UNIT: mm

BUSINESS

JH06

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社