


## SPLASH-PROOF SPEAKERS

### MA-15

RATED INPUT	10W
IMPEDANCE	8Ω (MA-15)
SOUND PRESSURE LEVEL	100dB (at 1m, 1W input)
FREQUENCY RESPONSE	500Hz~5kHz (Deviation 20dB)
FINISH	Horn Mouth (Aluminum): Light green (Corrosion-proof coating), (Munsell 2.5G7/2 approx.) Reflector (Aluminum): Light green (Corrosion-proof coating), (Munsell 2.5G7/2 approx.) Cover (Die-cast): Light green (Corrosion-proof coating), (Munsell 2.5G7/2 approx.) Bracket (Stainless): Light green (Corrosion-proof coating), (Munsell 2.5G7/2 approx.)
FITTINGS	U-shape Bracket, S-size
DIMENSIONS	φ145(Daim.) × 135(L)mm
MASS	Approx. 1.3kg

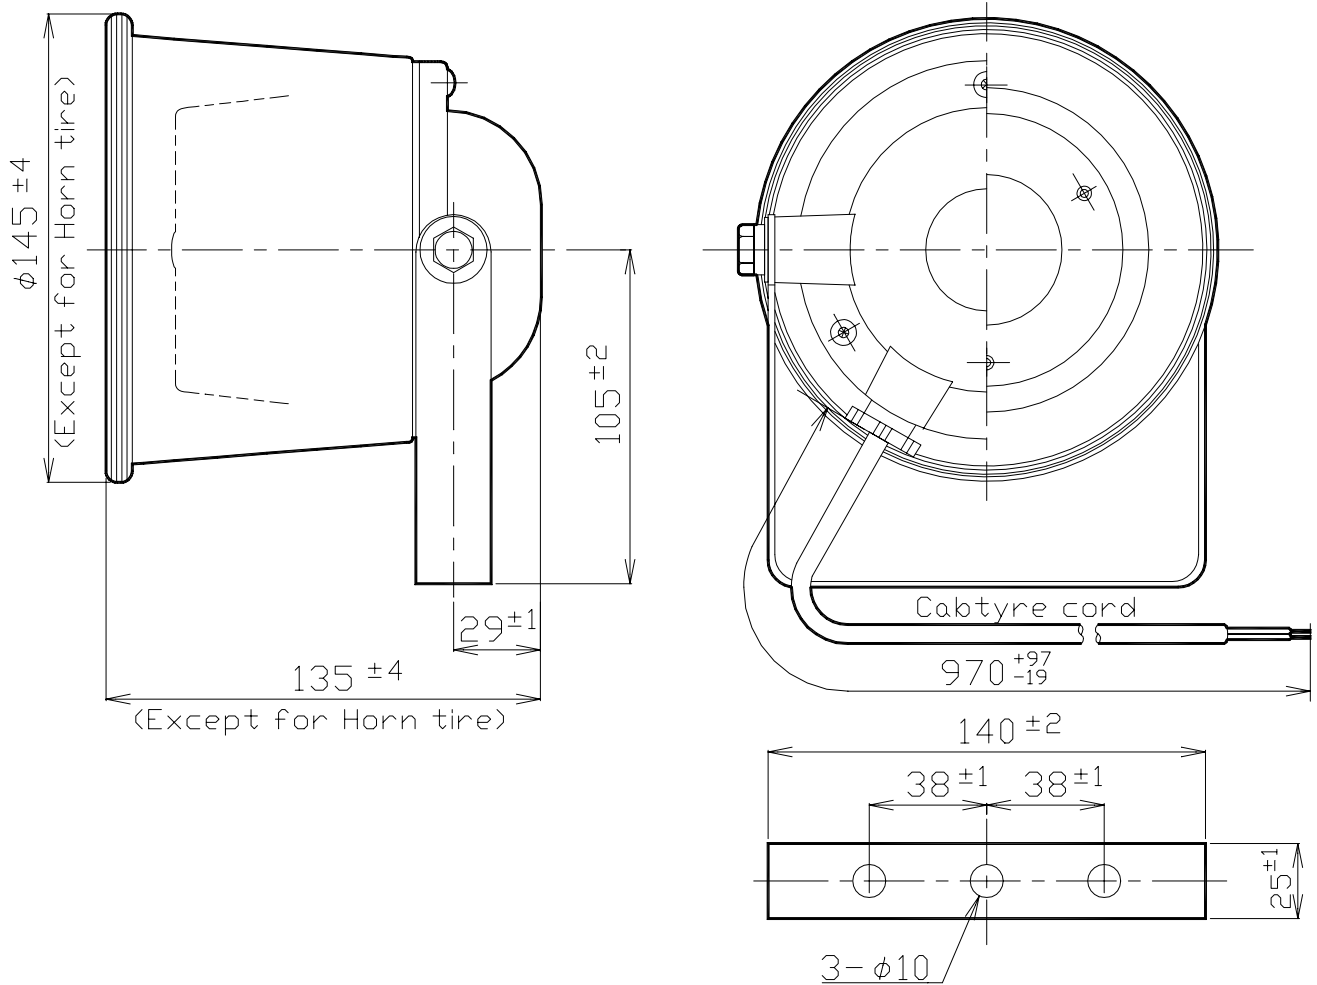

UNIT: mm

BUSINESS

JH09

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社