


Specification

UNI-PEX

SPLASH-PROOF SPEAKERS

MA-15/16

RATED INPUT	10W
IMPEDANCE	16Ω
SOUND PRESSURE LEVEL	100dB (at 1m, 1W input)
FREQUENCY RESPONSE	500Hz~5kHz (Deviation 20dB)
FINISH	Horn Mouth: (Aluminum), Light green (Corrosion-proof coating), (Munsell 2.5G7/2) Reflector: (Aluminum), Light green (Corrosion-proof coating), (Munsell 2.5G7/2) Cover: (Die-cast), Light green (Corrosion-proof coating), (Munsell 2.5G7/2) Bracket: (Stainless), Light green (Corrosion-proof coating), (Munsell 2.5G7/2)
FITTINGS	U-shape Bracket
DIMENSIONS	φ145(Daim.) × 135(L)mm
MASS	Approx. 1.35kg

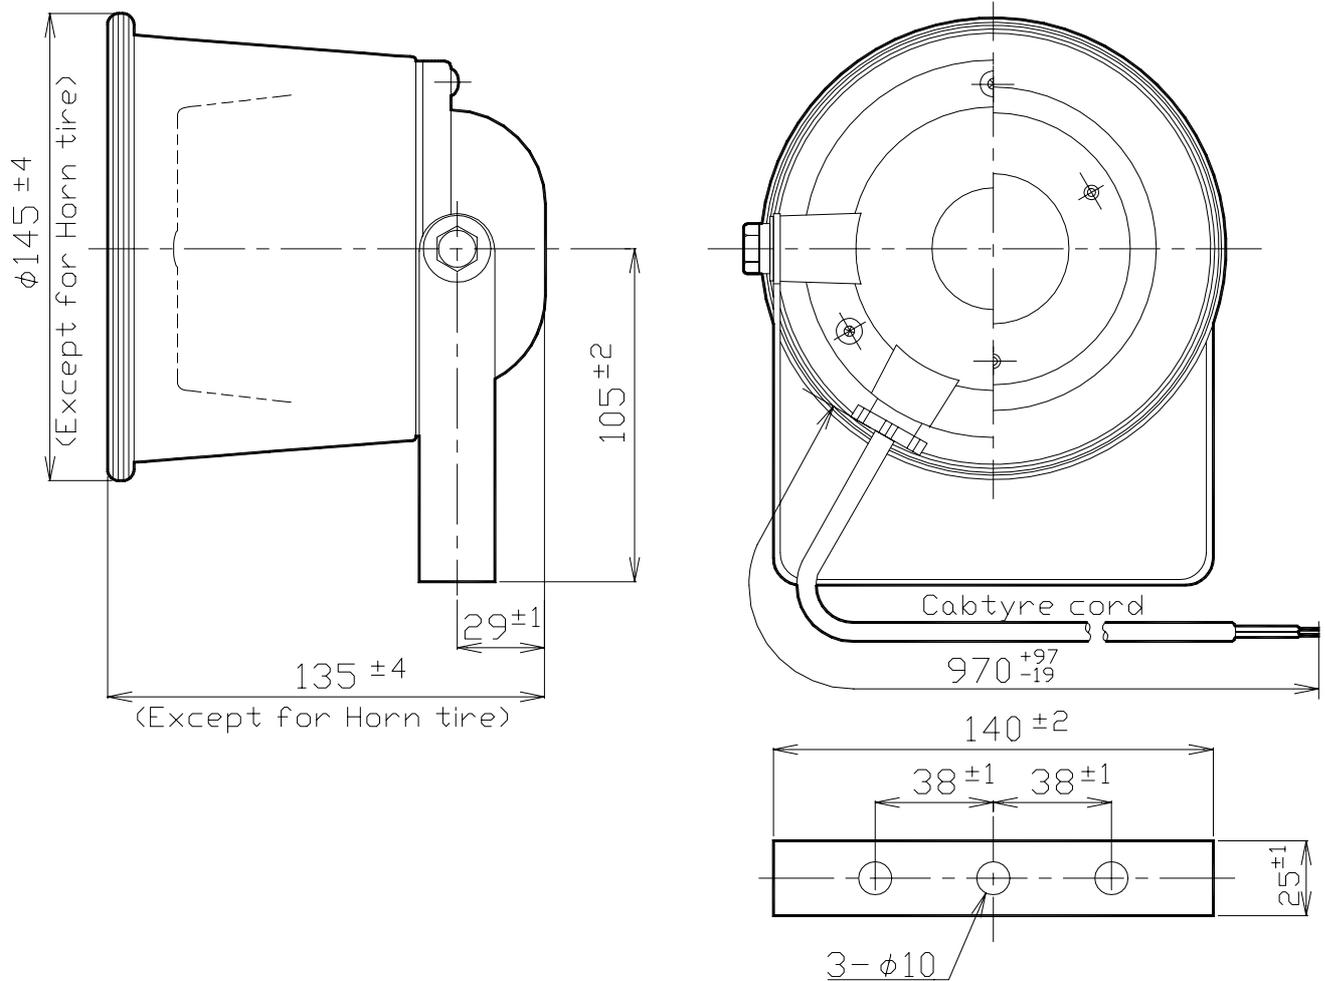

UNIT: mm

BUSINESS

JF05

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社