


Specification

UNI-PEX

DYNAMIC MICROPHONE

MD-40A

| | |
|---------------------|--|
| IMPEDANCE | 600 Ω ±30% Balanced (at 1kHz) (Unbalanced connection at the time of shipment) |
| SENSITIVITY | -51dB ±3dB (at 1kHz, 0dB=1V/Pa=0.1V/μ bar) |
| FREQUENCY RESPONSE | 100Hz~10kHz (at 1kHz, Deviation within +12dB -10dB) |
| DIRECTIVITY | Uni-directional |
| FINISH | Case table: (Zinc die-casting), Nickel aventurine Case reverse: (Zinc die-casting), Semi-matt Black (Munsell N1.0 approx.) Metal net: (Zinc iron wire), Black mat Chrome plated (Munsell N1.0 approx.) |
| DIMENSIONS | 49 (W) × 180 (L) × 35 (D) mm |
| MASS | Approx. 650g |
| ADDITIONAL FEATURE | Built-in on/off talk switch, Cord: 6m long with phone plug |
| ACCESSORIES | Instruction manual x 1 |
| APPLICABLE STANDARD | JIS C 5502 Microphone |

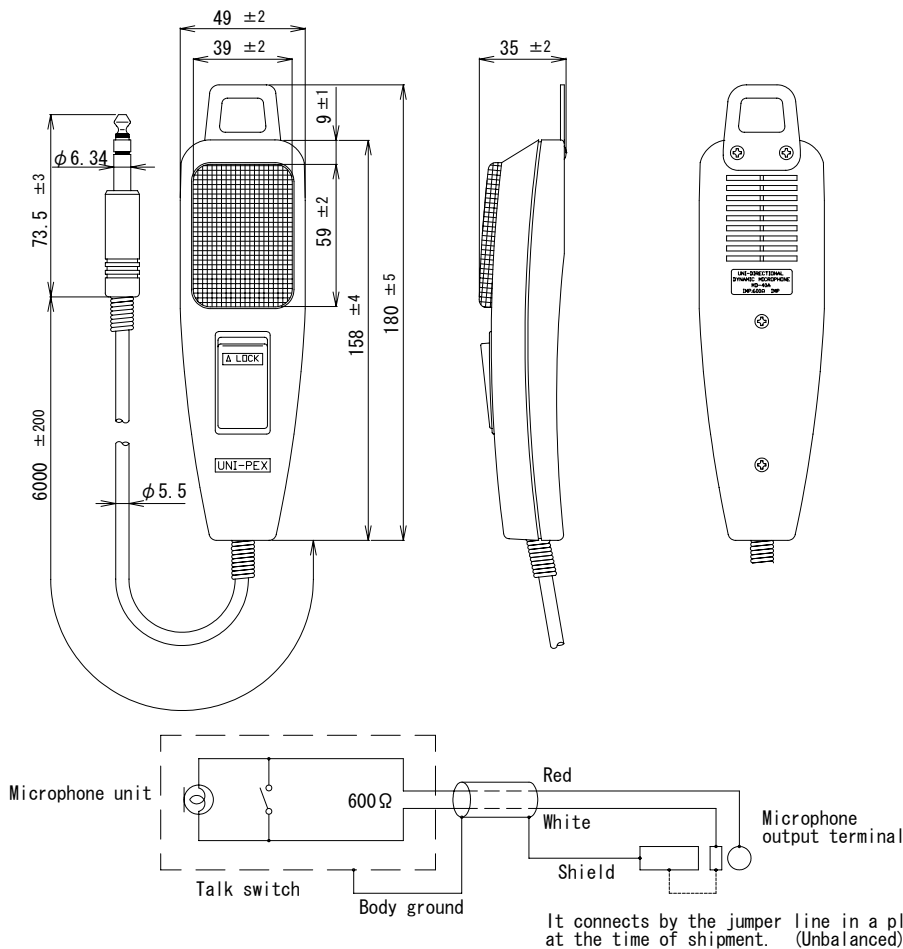

UNIT: mm

BUSINESS

JD01

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社