


DYNAMIC MICROPHONE

MD-53

IMPEDANCE	600 Ω \pm 20% Balanced (at 1kHz) (Unbalanced connection at the time of shipment)
SENSITIVITY	-56dB \pm 3dB(at 1kHz, 0dB=1V/Pa=0.1V/ μ bar)
FREQUENCY RESPONSE	70Hz~12kHz (at 1kHz, Deviation within +12dB -12dB)
DIRECTIVITY	Unidirectional
FINISH	All metal: (Head) Black paint, (body) Black with paint
DIMENSIONS	ϕ 53.4 (Daim.) \times 174.5 (L) mm (without connector)
MASS	Approx. 570g (Approx. 250g without cord, without accessories)
ADDITIONAL FEATURE	Built-in on/off talk switch and windshield
ACCESSORIES	Cord: 5m long with Phone plug \times 1, Stand adapter(W5/16) \times 1, Instruction manual \times 1
APPLICABLE STANDARD	JIS C 5502 Microphone

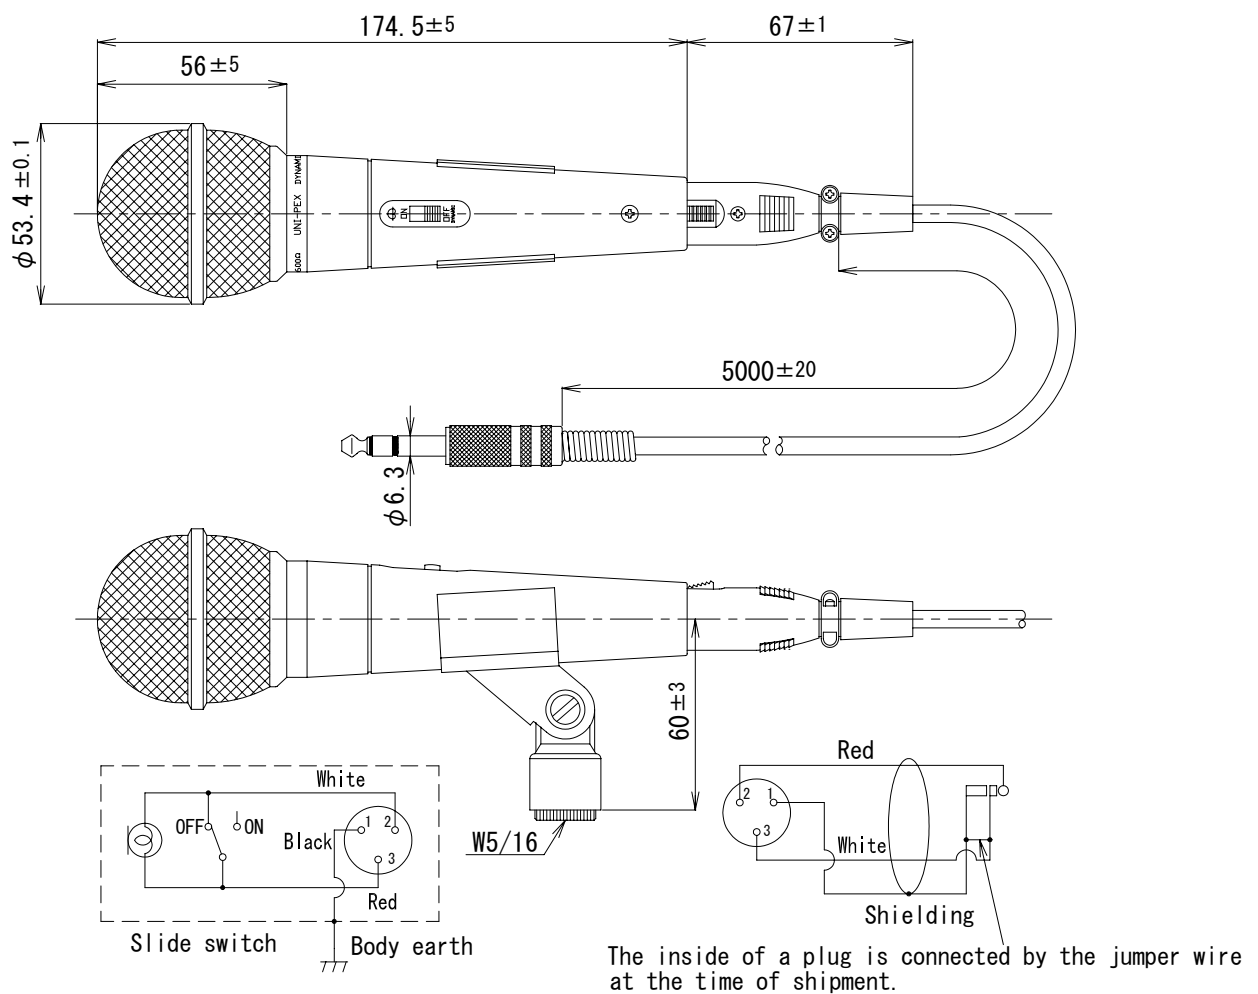

Unit:mm

BUSINESS

JD01