


Specification

UNI-PEX

DYNAMIC MICROPHONE

MD-55

IMPEDANCE	600Ω ±30% Balanced (at 1kHz) (Unbalanced connection at the time of shipment)
SENSITIVITY	-52dB±3dB(at 1kHz,0dB=1V/Pa=0.1V/μ bar)
FREQUENCY RESPONSE	100Hz~10kHz (at 1kHz, Deviation within +12dB -10dB)
DIRECTIVITY	Uni-directional
FINISH	All metal: (Head) Silver with paint, (body) Metallic gray with paint
DIMENSIONS	φ 52 (Daim.) × 178 (L) mm (without connector)
MASS	Approx. 560g (Approx. 239g without cord, without accessories)
ADDITIONAL FEATURE	Built-in on/off talk switch and windshield
ACCESSORIES	Cord: 6m long with phone plug × 1, Stand adapter(W5/16) × 1, Instruction manual × 1
APPLICABLE STANDARD	JIS C 5502 Microphone

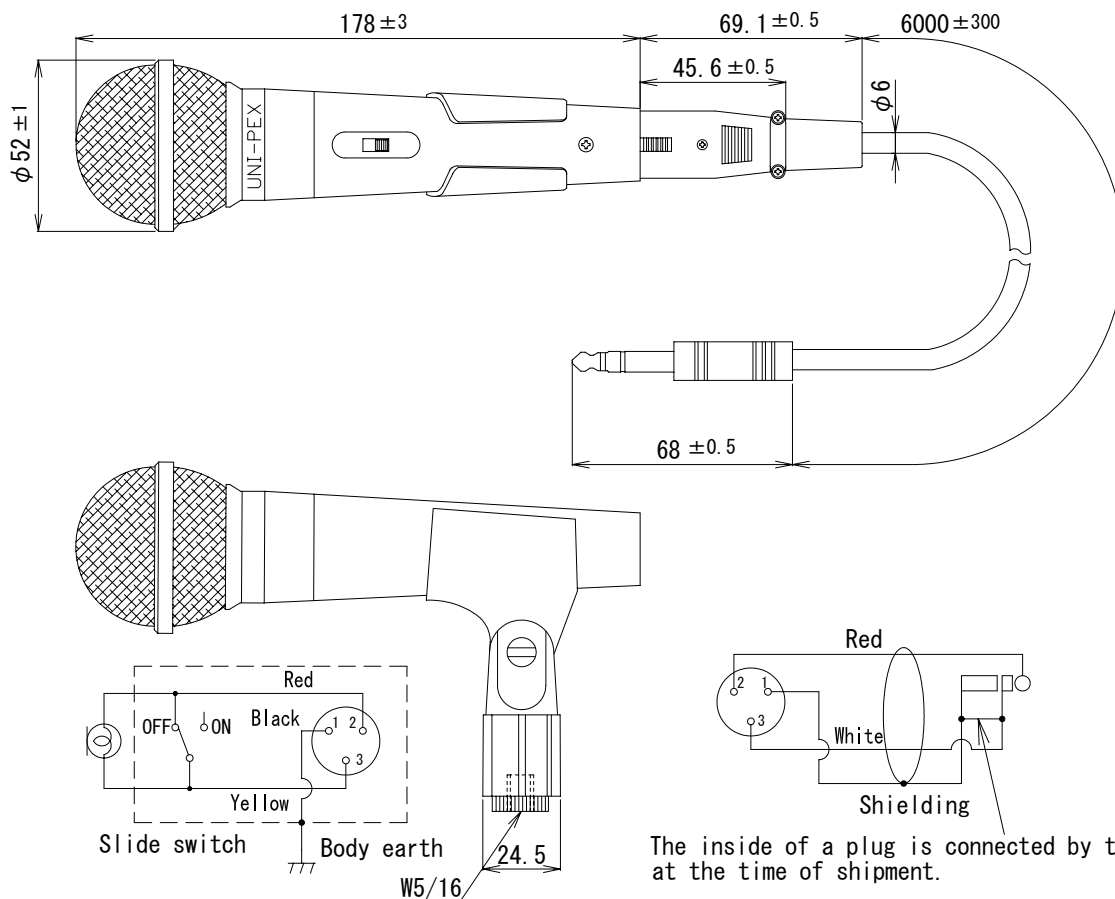

UNIT: mm

BUSINESS

JD01

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社