


DYNAMIC MICROPHONE

MD-56

IMPEDANCE	600 Ω \pm 30% Balanced (at 1kHz) (Unbalanced connection at the time of shipment)
SENSITIVITY	-52dB \pm 3dB(at 1kHz,0dB=1V/Pa=0.1V/ μ bar)
FREQUENCY RESPONSE	50Hz \sim 15kHz (at 1kHz, Deviation within +12dB -15dB)
DIRECTIVITY	Uni-directional
FINISH	All metal: (Head) Metallic gray with paint, (body) Metallic gray with paint
DIMENSIONS	ϕ 52 (Daim.) \times 176 (L) mm (without connector)
MASS	Approx. 580g (Approx. 260g without cord, without accessories)
ADDITIONAL FEATURE	Built-in on/off talk switch and windshield
ACCESSORIES	Cord: 6m long with phone plug \times 1, Stand adapter(W5/16) \times 1, Instruction manual \times 1
APPLICABLE STANDARD	JIS C 5502 Microphone

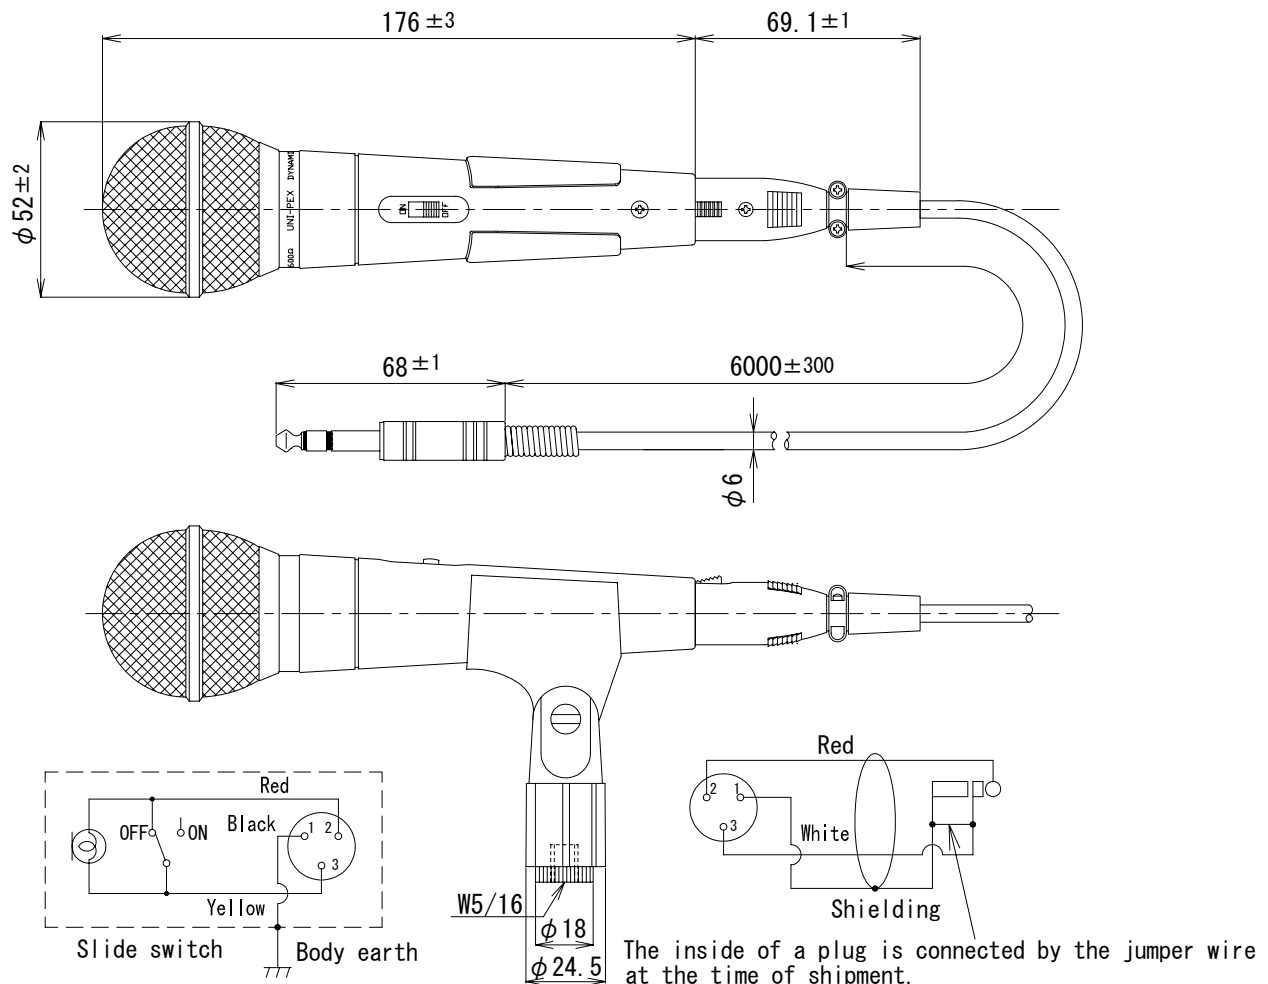

UNIT: mm

BUSINESS

JD01

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社