Specification

UNI-PEX

DYNAMIC MICROPHONE

MD－5A

IMPEDANCE	600Ω ±30%(at 1kHz), Unbalanced
SENSITIVITY	－53dB ±3dB(at 1kHz, 0dB＝1V／Pa＝0.1V／μbar)
FREQUENCY RESPONSE	300Hz～7kHz(1kHz basis, Deviation within ＋10dB, －12dB)
DIRECTIVITY	Unidirectional
FINISH	(ABS resin): Black, (Munsell N1 approx.)
TYPE	Hand-type
DIMENSIONS	40(W) x 150(H) x 29(D) mm
MASS	Approx. 130g
ADDITIONAL FEATURE	Talk switch, Hook, Cord with Phone plug(1000mm)
ACCESSORIES	Instruction manual x1, Microphone holder x1, Screw (M4×12) x2
APPLICABLE STANDARD	JIS C 5502 マイクロホンに準ずる

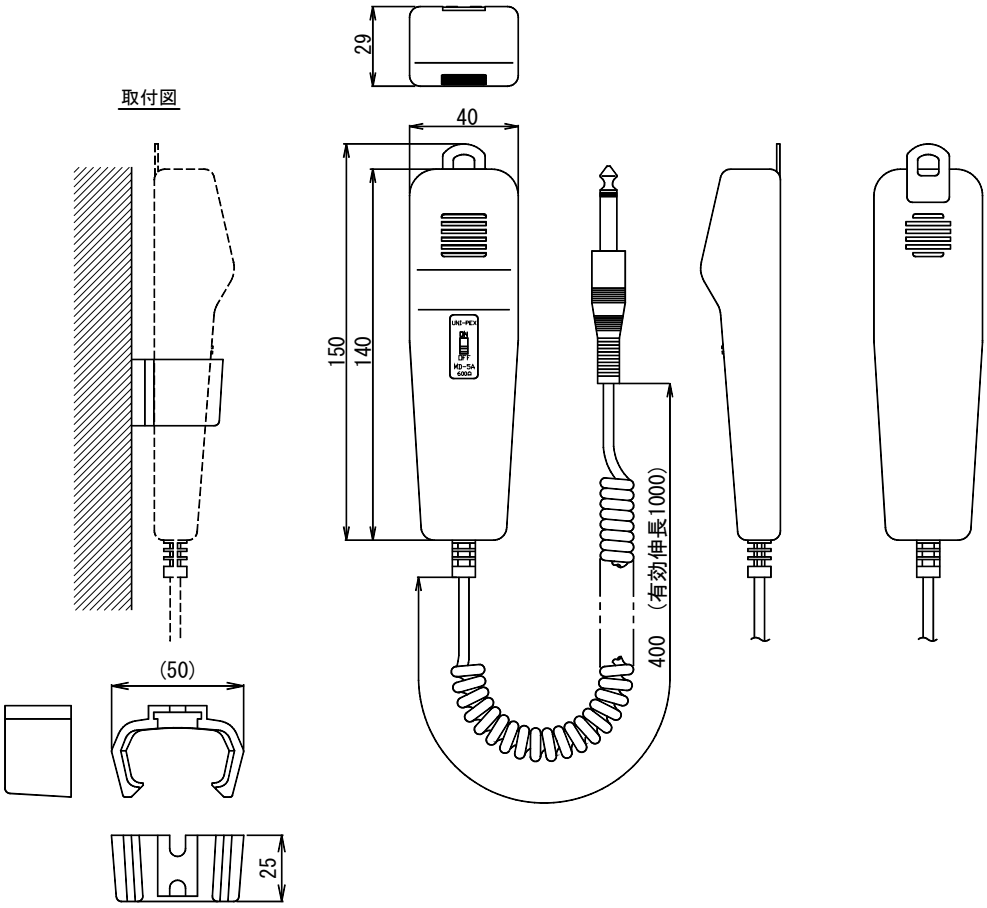

Unit:mm

	BUSINESS	
JF09		

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社