


FLEXIBLE MICROPHONE

ME-40

IMPEDANCE	1.8k Ω \pm 30% Unbalanced (at 1kHz)
POWER SUPPLY	DC1.5V (DC1.1V~9V)
SENSITIVITY	-33dB \pm 3dB (at 1kHz, 0dB=1V/Pa=0.1V/ μ bar)
FREQUENCY RESPONSE	100Hz~5kHz (at 1kHz, Deviation within +8dB -15dB)
MICROPHONE SYSTEM	Electric condenser microphone
DIRECTIVITY	Unidirectional
FINISH	Body: (anodized aluminum), Black Flexible shaft: (Metal), Black with electrodeposition paint Fixture: (Metal), Black with electrodeposition paint
DIMENSIONS	ϕ 13.6 (Diam.) \times 175 (L) mm (without cord and windscreen)
MASS	Approx. 140g
ACCESSORIES	Windscreen \times 1
APPLICABLE STANDARD	JIS C 5502 Microphone

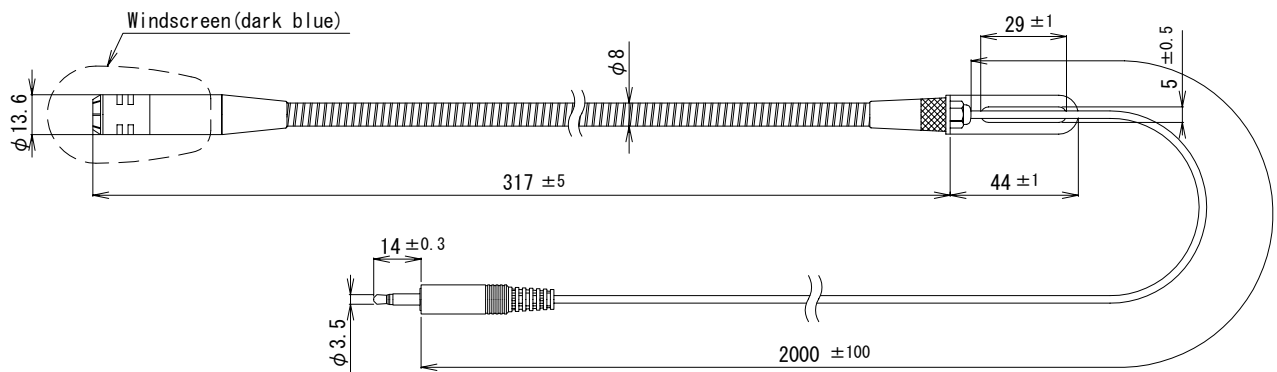

UNIT: mm

BUSINESS

JD01