


CEILING SPEAKER

PS-300

RATED INPUT	3W
RATED IMPEDANCE	3.3k Ω (3W), 5k Ω (2W), 10k Ω (1W) (High Impedance 100V Line)
SOUND PRESSURE LEVEL	93dB (at 1m, 1W input)
FREQUENCY RESPONSE	80Hz~12kHz (Deviation 20dB)
SPEAKER	ϕ 16cm dynamic cone speaker 8 Ω
FINISH	Baffle (PS Resin): White (Munsell 2.5BP9/2 approx.)
INSTALLATION HOLE'S DIAM	ϕ 180 mm ~ ϕ 200 mm
DIMENSIONS	303(W) X 303(H) X 69(D) mm
MASS	Approx. 1.0kg

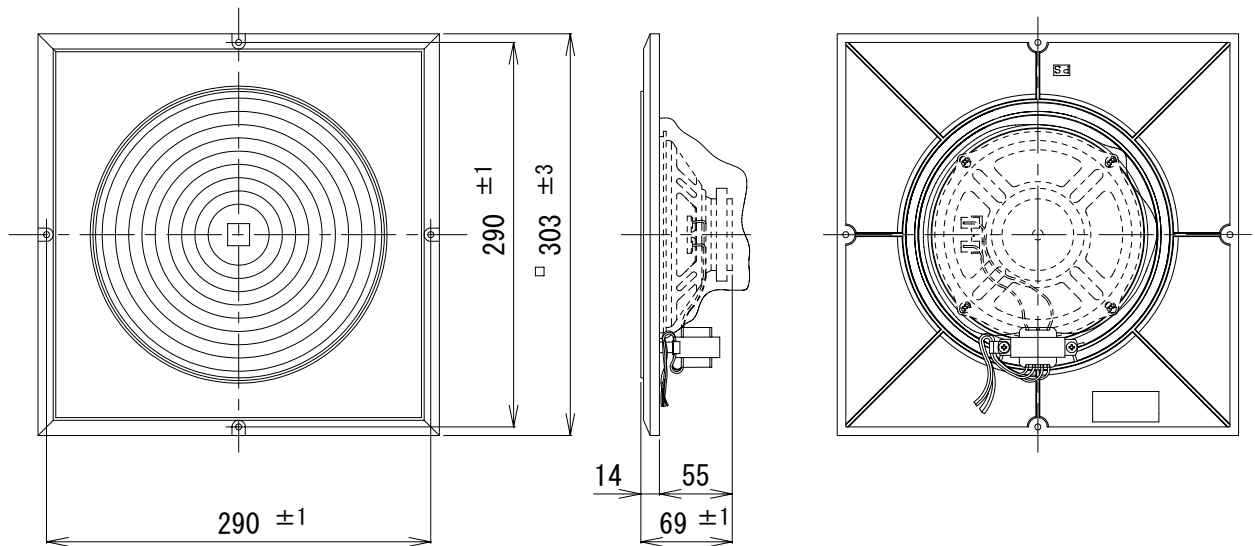

UNIT: mm

BUSINESS

JH09

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社