

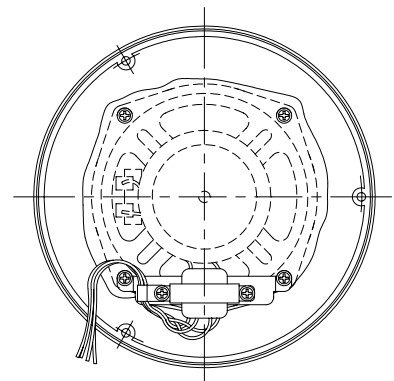
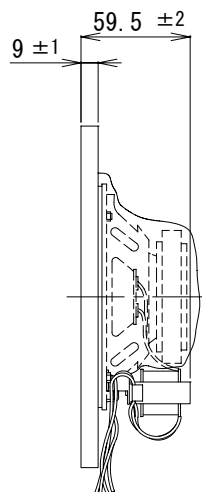


## PANEL SPEAKER

### PS-315LG

|                          |                                                                                                        |
|--------------------------|--------------------------------------------------------------------------------------------------------|
| RATED INPUT              | 3W                                                                                                     |
| RATED IMPEDANCE          | 3.3k $\Omega$ (3W), 5k $\Omega$ (2W), 10k $\Omega$ (1W) (High Impedance 100V Line)                     |
| SOUND PRESSURE LEVEL     | 93dB (at 1m, 1W input)                                                                                 |
| FREQUENCY RESPONSE       | 120Hz~12kHz (Deviation 20dB)                                                                           |
| SPEAKER                  | $\phi$ 12cm dynamic cone speaker 8 $\Omega$                                                            |
| FINISH                   | Grille (Aluminum): Stainless color, Sand-blast<br>Baffle (Jersey-net): Light Gray (Munsell N6 approx.) |
| INSTALLATION HOLE'S DIAM | $\phi$ 135 mm ~ $\phi$ 140 mm                                                                          |
| DIMENSIONS               | $\phi$ 180(Diam.) X 59.5(D) mm                                                                         |
| MASS                     | Approx. 540g                                                                                           |
| ACCESSORIES              | Instruction manual 1, Fitting Screw ( $\phi$ 4 X 38) 3                                                 |

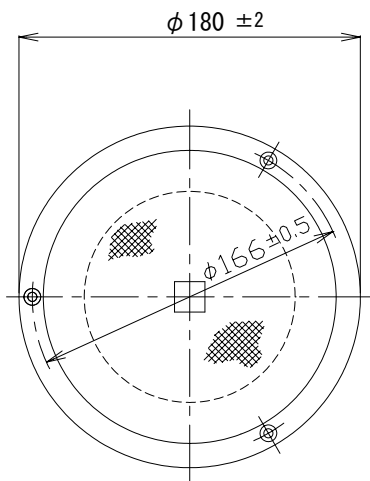

The size of the hole for installing a speaker

UNIT: mm

BUSINESS

JH09

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社