


SONO-COLUMN SPEAKER

SC-20JA

RATED INPUT	20W
RATED IMPEDANCE	500 Ω (20W)/670 Ω (15W)/1k Ω (10W) <100V line> 8 Ω
SOUND PRESSURE LEVEL	92dB (at 1m/1W)
FREQUENCY RESPONSE	200Hz~6kHz(Deviation 20dB)
SPEAKER COMPONENT	ϕ 10cm Dynamic Cone-Speaker 8 Ω $\times$ 8pcs
FINISH	Case (Aluminum): Silver Panel (Steel, Punching metal): Dark-gray (Munsell N4.5 approx.) Cover (ABS resin): Light-gray (Munsell N5.5 approx.)
DIMENSIONS	125(W) $\times$ 900(H) $\times$ 87(D)mm
MASS	Approx. 4kg
ACCESSORIES	Instruction manual $\times$ 1, Fitting panel x1, Screw(M5x12) x2, Bolt(M8x18) x2

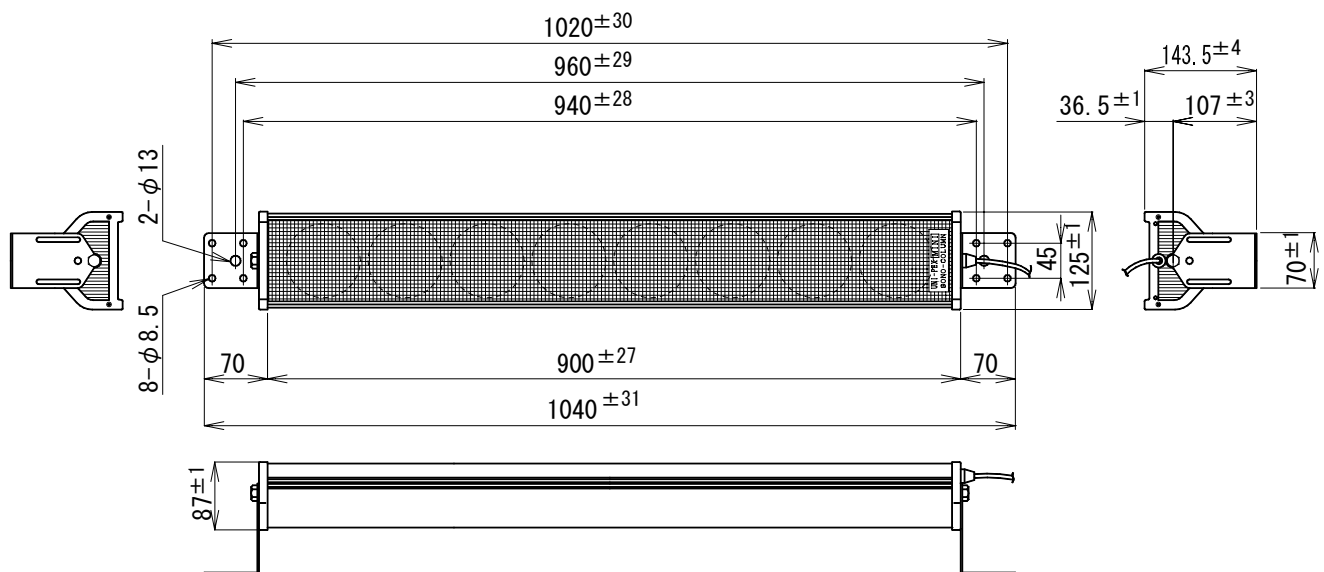

UNIT: mm

BUSINESS