


SONO-COLUMN SPEAKER

SC-40A

RATED INPUT	20W
RATED IMPEDANCE	500 Ω (20W)/670 Ω (15W)/1k Ω (10W)/1.3k Ω (7.5W) <100V line> 8 Ω
SOUND PRESSURE LEVEL	95dB(at 1m/1W input)
FREQUENCY RESPONSE	130Hz~10kHz(Deviation 20dB)
SPEAKER COMPONENT	ϕ 16cm Dynamic Cone-Speaker 8 Ω $\times$ 4pcs
FINISH	Case (Aluminum): Silver Panel (Steel, Punching metal): Black (Munsell N4.5 approx.) Cover (Aluminum die-cast): Light gray
DIMENSIONS	200(W) $\times$ 800(H) $\times$ 121(D)mm
MASS	Approx. 7.0kg
ACCESSORIES	Instruction manual $\times$ 1, A set of mount fittings

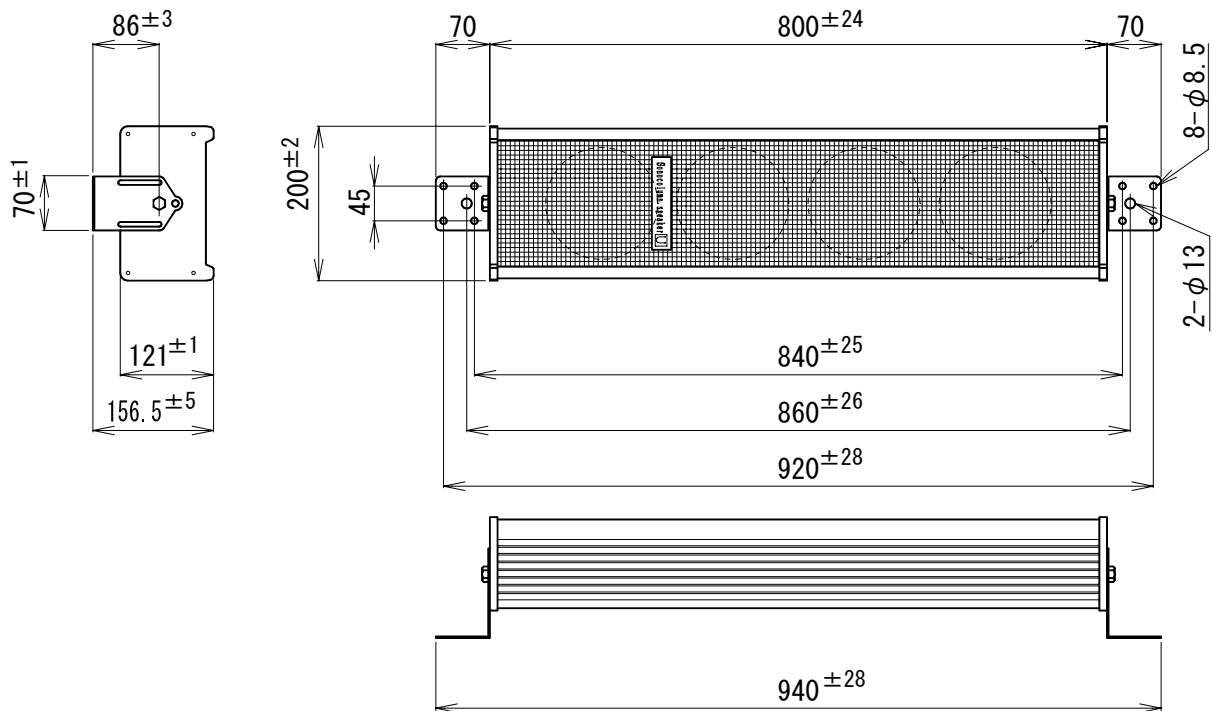

UNIT: mm

BUSINESS

J105

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社