

Specification

UNI-PEX

No.1

SD RECORDER UNIT

SDU-200

SUPPLY VOLTAGE	DC12V (Supplied from built-in equipment)
CURRENT CONSUMPTION	200mA or less +10% -30%(Recording: at 12V)
INDICATOR	Operation: LCD Backlight: LED (Green) Recording: LED (Red)
APPLICABLE SD CARD	SDA-compliant SD-card(16MB~2GB, excluding 'SDHC')
FILE SYSTEM	FAT12, FAT16
MAXIMUM SAVED FILE	512 (It depends on card's capacity and number of files) Saving accommodate root directory.
AUDIO COMPANDING SYSTEM	MP3(MPEG1 Audio Layer3)
PLAYBACK BIT RATE	32kbps~320kbps
RECORDING BIT RATE	128kbps(Sampling frequency: 44.1kHz)
FREQUENCY RESPONSE	20Hz~20kHz (Deviation 20Hz: +0-3dB, 20kHz: +0-8dB:Playback)
SPEED CONTROL	-15~+15% variability (± 15 levels)
S/N RATIO	70dB or more
DYNAMIC RANGE	65dB or more
LINEARITY	$\pm 1.0, 0dB(0dB to -40dB)$
DISTORTION RANGE	0.2% or below
SELECTION METHOD	Backward and forward of selected music
INPUT SENSIVITY	Recording input: $-2dBV \pm 3dB$ 10k Ω
OUTPUT SENSIVITY	Playing output: $-4dBV \pm 3dB$ 10k Ω
FUNCTION	Elapsed time, Speed control, Pause, Mode select, Volume control, Skip function, Fast-forward and fast-rewind function, Clear function, Formatting function Program play function, Program entry*edit*erase function
TEMPERATURE RANGE	0°C~+40°C
FINISH	Case(ABSresin):Black, medium gross coating
DIMENSION	169(W) x 50(H) x 157(D) mm
MASS	Approx. 570g
ACCESSORIES	Instruction manual x 1
APPLICABLE PRODUCT	Wireless amplifier, WA-361A, WA-362A, WA-862A series

BUSINESS


JI10

Specification

UNI-PEX

No. 2

SD RECORDER UNIT
SDU-200

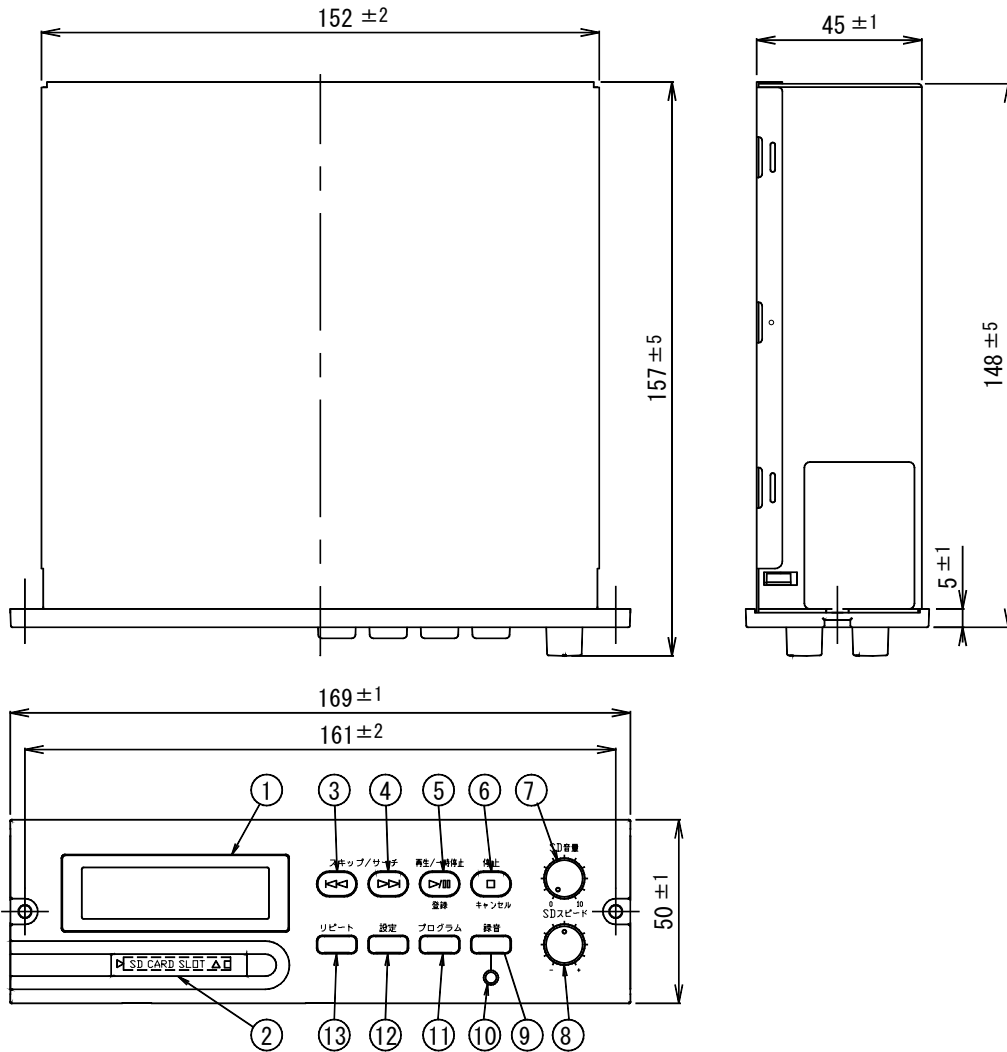

番号	名称
1	表示部
2	ダストカバー(SDカード挿入口)
3	スキップ/サーチボタン(ダウン)
4	スキップ/サーチボタン(アップ)
5	再生/一時停止ボタン
6	停止ボタン
7	音量調節つまみ
8	スピード調節つまみ
9	録音ボタン
10	録音表示灯
11	プログラム再生ボタン
12	設定ボタン
13	リピートボタン

Unit: mm

BUSINESS

J110

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社