


EXPOSED TYPE SPEAKER

SP-233LA

RATED OUTPUT	3W
IMPEDANCE	3.3k Ω (3W) 10k Ω (1W) <100V line>
SOUND PRESSURE LEVEL	93dB (at 1W/1m)
FREQUENCY RESPONSE	140Hz~16kHz (deviation 20dB)
VOLUME CONTROL	3W (0=OFF, 1=-12dB, 2=-7dB, 3=0dB) 1W (0=OFF, 1=-10dB, 2=-4dB, 3=0dB)
SPEAKER	ϕ 160mm Dynamic cone speaker 8 Ω
FINISH	Body(ABS resin): White (Munsell approx.5GY8/0.5) Net (SECC, t=0.5): Light gray (Munsell approx.10GY7.5/0.5)
DIMENSIONS	ϕ 230mm x 89(H) mm
MASS	Approx. 890g
ACCESSORIES	Instruction manual x1, Fitting metal x1, Screw(4 x 20) x2, Screw(M4 x 35) x2,

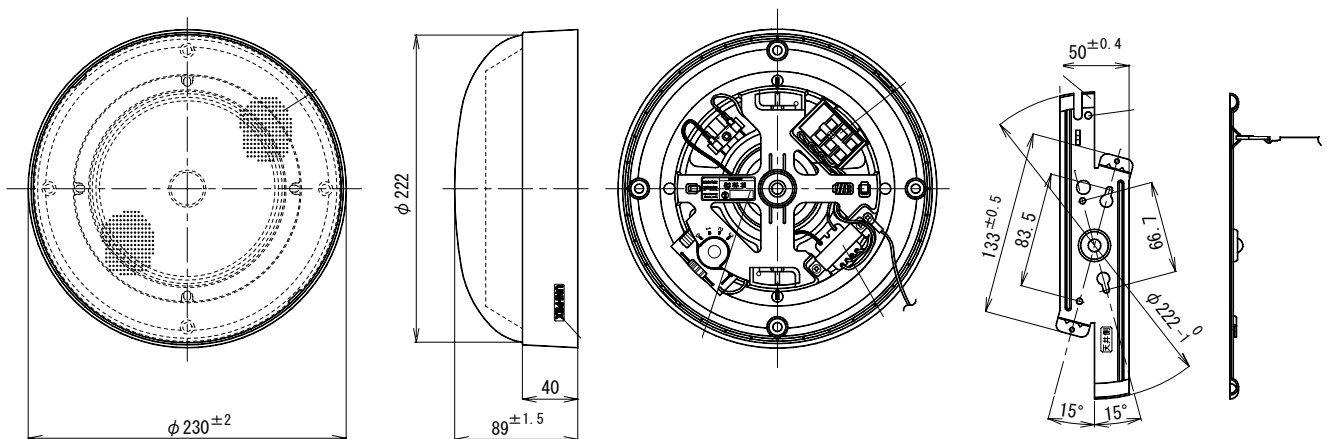

Unit: mm

BUSINESS

J106