


# Specification

**UNI-PEX**

## WIRELESS TUNER UNIT

### SU-3000A

POWER SUPPLY	DC12V (Supplied from built-in equipment)
CURRENT CONSUMPTION	Approx. 65mA
RECEIVING FREQUENCY	322.025MHz~322.150MHz, 322.250MHz~322.400MHz (13 channels at 25kHz interval)
RECEIVING SCHEME	PLL control superheterodyne
RECEIVING SENSITIVITY	20dB $\mu$ V or less (S/N 45dB at $\pm$ 2.25kHzFM)
SQUELCH SENSITIVITY	18dB $\mu$ V
INDICATOR	2-color LED (Standby: Red, Receiving: Green)
RATED OUTPUT	-20dBV
DISTORTION	3% or less (at $\pm$ 8kHzFM)
FREQUENCY RESPONSE	50Hz~7kHz (at 1kHz basis, 50 $\mu$ s emphasis)
TEMPERATURE RANGE	0°C~+40°C
FINISH	Panel (ABS resin): Black (Munsell N1 approx.) Case (Steel plate)
DIMENSIONS	84(W) x 30(H) x 122(D) mm
MASS	Approx. 165g
ACCESSORIES	Instruction manual x1, Channel setting driver x1

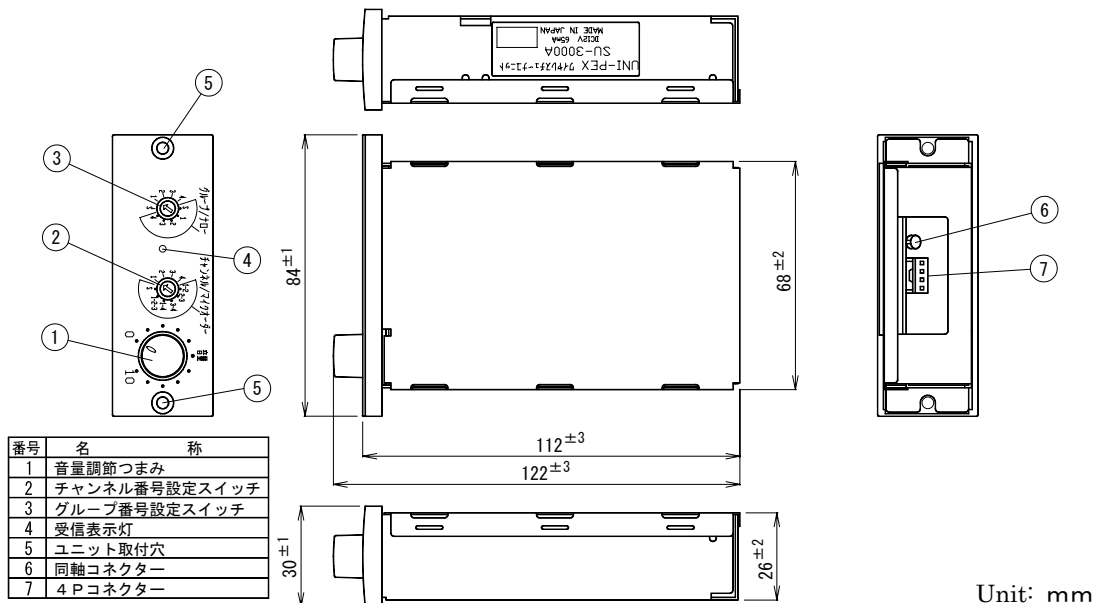

Unit: mm

BUSINESS

JH06

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社