


Specification

UNI-PEX

SPLASH-PROOF TYPE MEGAPHONE WITH SIREN

TR-315S

POWER SUPPLY	R14PU (C-size dry cells) x 6 pcs
OUTPUT	Rated 15W, Maximum 20W
SIREN FREQUENCY	400Hz~800Hz Repetition cycle 5seconds
SOUND COVERAGE	Voice signal: Approx. 315m (JEITA) Siren: Approx. 500m (JEITA)
BATTERY POWER DURATION	Voice signal: Approx. 18hours (JEITA) Siren: Approx. 40minutes (JEITA)
DIMENSIONS	φ 208mm(horn dia.) x 320mm(total length)
FINISH	ASA resin, Red (Munsell 7.5R4/14) Horn mouth: ASA resin, Clear red
MASS	Approx. 1.1kg (without batteries)
APPLICABLE STANDARD	JIS C 0920 (=IEC 60529) Protection grade level 4 (IPX4) EU-RoHS compliance
ACCESSORY	Instruction Manual X 1

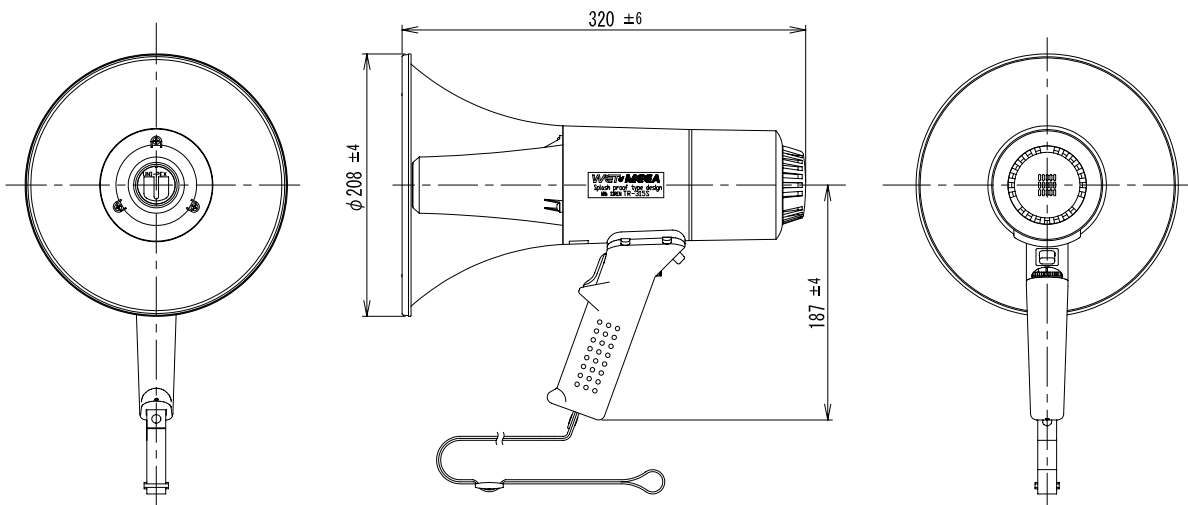

UNIT: mm

BUSINESS

JH08

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社