


Specification

UNI-PEX

SPLASH-PROOF TYPE MEGAPHONE WITH WHISTLE

TR-315W

POWER SUPPLY	R14PU (C-size dry cells) x 6 pcs
OUTPUT	Rated 15W, Maximum 20W
WHISTLE FREQUENCY	Basic: Approx. 2.4kHz, Modulation: Approx. 20Hz
SOUND COVERAGE	Voice signal: Approx. 315m (JEITA) Whistle: Approx. 500m (JEITA)
BATTERY POWER DURATION	Voice signal: Approx. 12hours (JEITA) Whistle: Approx. 20minutes (JEITA)
DIMENSIONS	φ 208mm(horn dia.) x 320mm(total length)
FINISH	Body (ASA resin): Light blue (Munsell 7.5R4/14) Horn mouth (ASA resin): Clear blue
MASS	Approx. 1.1kg (without batteries)
APPLICABLE STANDARD	JIS C 0920 (=IEC 60529) Protection grade level 4 (IPX4)
ACCESSORY	Instruction Manual x 1

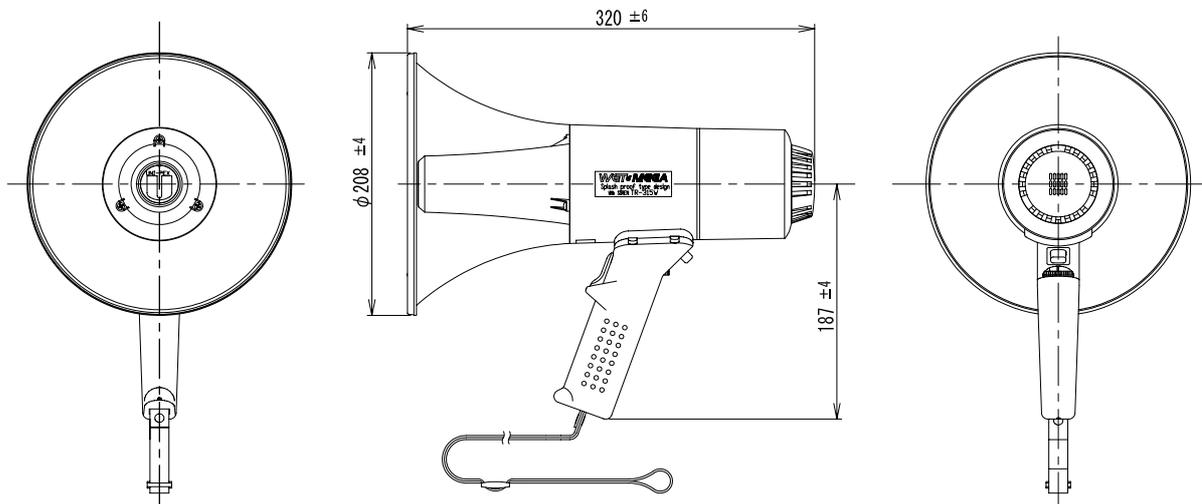

UNIT: mm

BUSINESS

JH08

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社