


Specification

UNI-PEX

WIRELESS RECEIVER, DIVERSITY

WTD-304

POWER SUPPLY	AC100V 50/60Hz
CURRENT CONSUMPTION	15W
ANTENNA INPUT	75Ω (BNC) 2 input, 2 system (Phantom power supply: 12V 20mA × 4)
MIXING OUTPUT	0dBV, -20dBV, -60dBV, 600Ω Unbalanced (Selectable/ Balanced transformer LT-16installable)
UNIT OUTPUT	-20dBV 600Ω Unbalanced (Balanced transformer LT-16installable)
LINE INPUT	-20dBV 600Ω Unbalanced
DISTORTION	0.5%
FREQUENCY RESPONSE	50Hz~15kHz ±3dB
TEMPERATURE RANGE	0°C~+40°C
FINISH	Panel (Aluminum): Black (Munsell N1 approx.) Case (Vinyl-laminated steel): Black (Munsell N1 approx.)
DIMENSIONS	420(W) x 45(H) x 274(D) mm
MASS	Approx. 3.1kg
ACCESSORY	Cord with phone plug (1m) × 1, Instruction manual × 1
APPLICABLE MICROPHONE	300MHz band wireless microphone
APPLICABLE PRODUCT	Diversity wireless tuner unit, DU-3200A Balanced transformer, LT-16 Rack mounting bracket, EEP-44

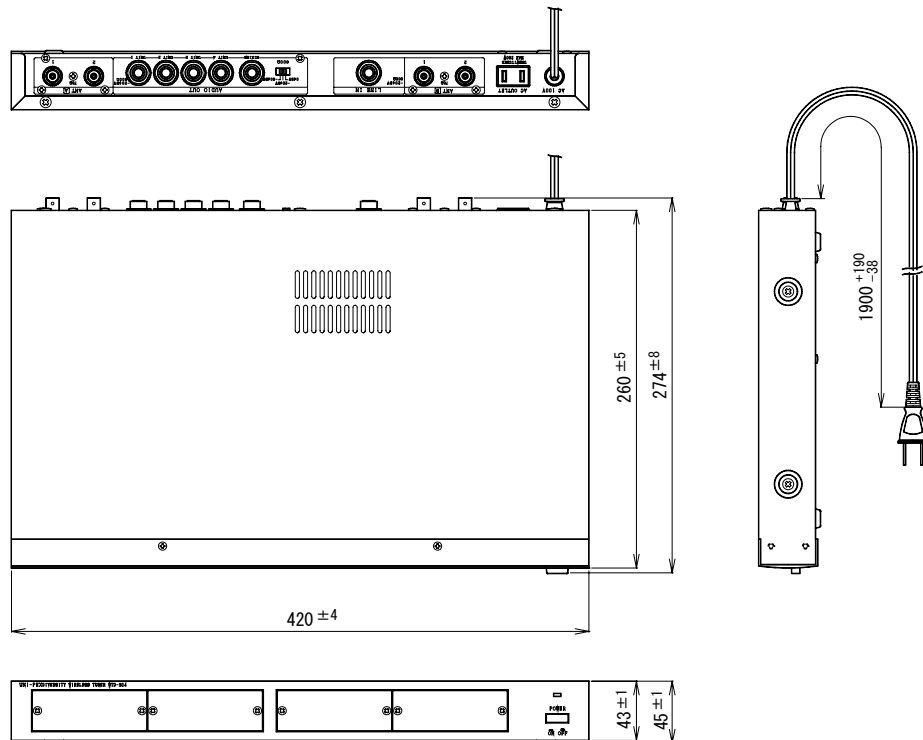

Unit: mm

BUSINESS

JD01

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社