# Specification

UNI-PEX

## DRIVER UNIT WITH BUILT-IN TRANSFORMER

## P-300T

| | |
|---|---|
| RATED INPUT | 30W |
| IMPEDANCE | 330Ω(30w)/400Ω(25W)/500Ω(20W)/1kΩ(10W) <High Impedance 100 Line> |
| DIAMETER OF JOINT POINT | φ34.925mm |
| SOUND PRESSURE LEVEL | 110dB (at 1m, 1W input) |
| FREQUENCY RESPONSE | 125Hz～7kHz (Deviation 20dB) |
| FINISH | Throat: (Aluminum die-cast), Gray (Munsell N4.0 Approx.) |
| | Case: (Aluminum), Gray (Munsell N4.0 Approx.) |
| DIMENSIONS | φ104.5(Diam.) × 148(Length)mm |
| MASS | Approx. 2.2kg |

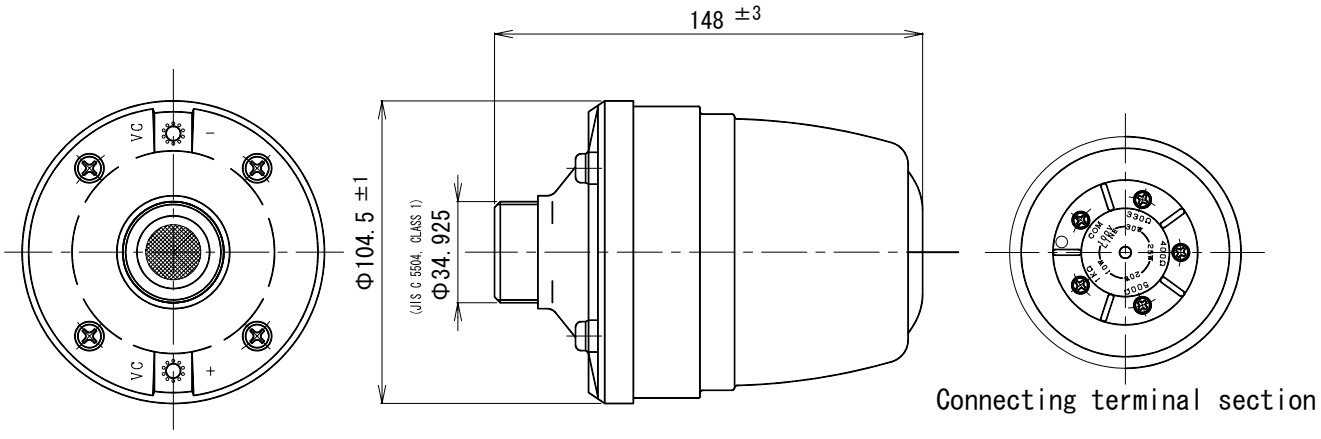


UNIT: mm

| | BUSINESS | |
|---|---|---|
| JH01 | | |

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社